

---

# BuzziBrickBack

## Product Specification Sheet

---

This document contains technical information about the BuzziBrickBack

---



[www.buzzi.space](http://www.buzzi.space)



## Self-adhesive wall panel in sliced BuzziFelt




BrickBack is a unique looking sound absorbing and self-adhesive panel. Made of sliced BuzziFelt in the size and color-mix you prefer. You can pin all kinds of things to it.

It's functional and attractive in any office, home or hospitality environment.

Design by Sas Adriaenssens

---

## General

- BrickBack Horizontal Stripes | Vertical Stripes
-  Wall only  
Unicolor | Bicolor | Multicolor
-  Front Layer: Sliced BuzziFelt  
Back Layer: Self-adhesive BuzziSkin
-  No claims concerning deviation in color, size, and thickness can be accepted.  
Because of the nature of the product this can variate. The risk is more likely in different batches.

---

## Acoustics



Absorption



Diffusion



Mid tones



High tones

---

## Certifications



---

## Content

Configurations	3
Finishes	4
Dimensions	7

# Configurations


---

## BuzziBrickBack Horizontal stripes

🏷️ BrickBack Horizontal stripes  
Unicolor | Bicolor | Multicolor

🌲 Front Layer: Sliced BuzziFelt  
Back Layer: Self-adhesive BuzziSkin


✂️ Max. H 120 cm    W 200 cm  
Min. H 40 cm    W 80 cm  
Tolerance 0,6 cm  
Thickness:  $\pm 1,4$  cm

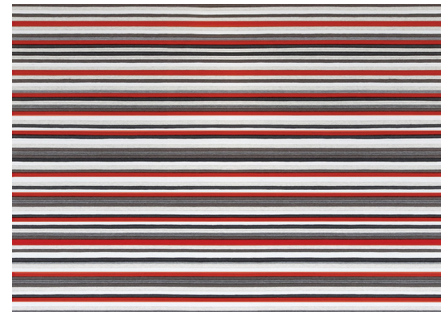

No claims concerning deviation in color, size, and thickness can be accepted.  
⚠️ Because of the nature of the product this can variate.  
The risk is more likely in different batches.

---

## BuzziBrickBack Vertical

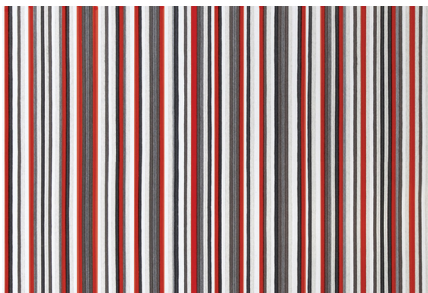

🏷️ BrickBack Vertical stripes  
Unicolor | Bicolor | Multicolor

🌲 Front Layer: Sliced BuzziFelt  
Back Layer: Self-adhesive BuzziSkin

✂️ Max. H 200 cm    W 120 cm  
Min. H 80 cm    W 40 cm  
Tolerance 0,6 cm  
Thickness:  $\pm 1,4$  cm

No claims concerning deviation in color, size, and thickness can be accepted.  
⚠️ Because of the nature of the product this can variate.  
The risk is more likely in different batches.

# Finishes

---

## General remark




The assembly of the sliced felt stripes results in a discontinuing line. When installing several panels next to each other the stripes will not be a continuous line. The product is developed as such that the patterns between different panels are never build up in the same order, meaning the order of the Felt slices are randomly placed during manufacturing . You will see the seam and the panels will not match up. This is for all versions. No claims concerning deviation in color, size, and thickness can be accepted. Because of the nature of the product this can variate. The risk is more likely in different batches.


 100% Recycl P.E.T. Felt   

---

## Unicolor




Lime | Lime



Orange | Orange




Red | Red




Pink | Pink




EcoBrown | EcoBrown



LightBlue | LightBlue



StoneGrey | StoneGrey




Anthracite | Anthracite



OffWhite | OffWhite



Curry | Curry



Jeans | Jeans



Mokka | Mokka

---

## Bicolor



OffWhite | Lime



OffWhite | Orange



OffWhite | Red



OffWhite | Pink



OffWhite | EcoBrown




Offwhite | LightBlue



Offwhite | StoneGrey



OffWhite | Anthracite



OffWhite | Curry



OffWhite | Jeans



OffWhite | Mokka


---

## Multicolor



Grass

LightBlue  
OffWhite  
Lime




Savannah

LightBlue  
EcoBrown  
Orange



Colibri

LightBlue  
StoneGrey  
Pink



Toendra

LightBlue  
StoneGrey  
Lime




Tukan

LightBlue  
Lime  
StoneGrey  
Red  
EcoBrown  
Orange  
Pink  
Anthracite  
OffWhite  
Curry




Zebra

Anthracite  
StoneGrey  
OffWhite



Jane

Anthracite  
StoneGrey  
EcoBrown  
OffWhite  
White  
Red





Sigma


Anthracite  
StoneGrey  
EcoBrown  
OffWhite  
White  
Orange

# Dimensions

---

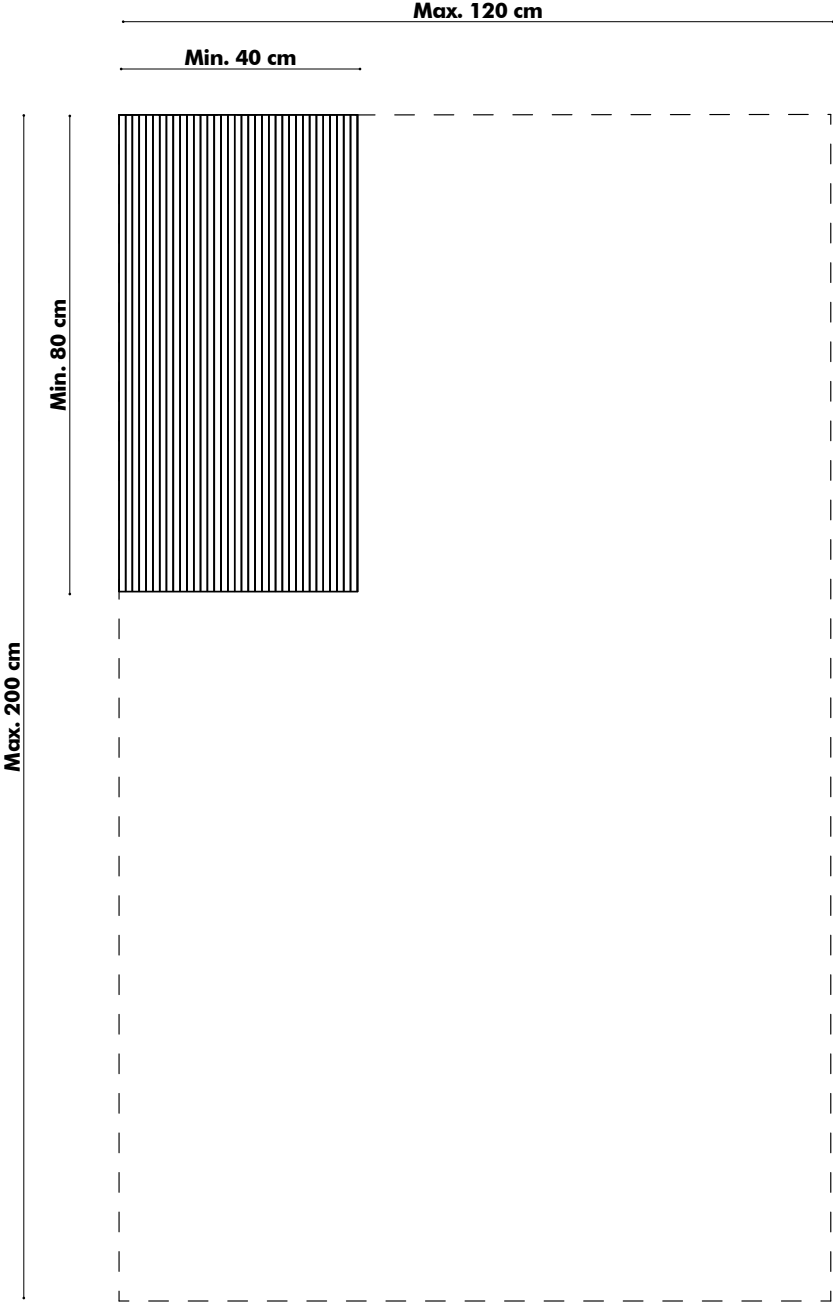

Front View




Side View

# Acoustics

## BuzziBrickBack

### Absorption coefficient

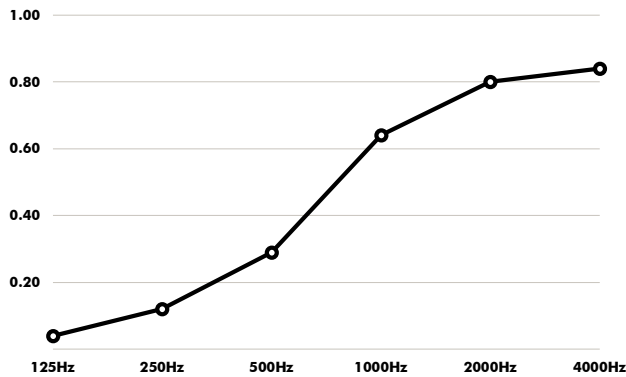

Hz	$\alpha^s$
125	0.04
250	0.12
500	0.29
1000	0.64
2000	0.80
4000	0.84

### Absorption Values

$\alpha_w$  (ISO 11654) **0.35**

NRC (ASTM - C423) **0.50**

SAA (ASTM-C423) **0.46**

## Glossary

All calculations are based on accredited lab measurements, official document available on Buzzi.Space

### Definitions

<b><math>\alpha</math></b>	Weighted absorption coefficient	(ISO 11654)
<b>NRC</b>	Noise reduction coefficient	(ASTM - C423)
<b>SAA</b>	Sound absorption average	(ASTM - C423)

### Classification of sound absorbers NEN-EN-ISO 11654

- A** 0.90 | 0.95 | 1.0
- B** 0.80 | 0.85
- C** 0.60 | 0.65 | 0.70 | 0.75
- D** 0.03 | 0.55
- E** 0.15 | 0.25