

TT 051-A

ACTIVE ULTRA COMPACT WIDE DISPERSION SPEAKER

DESCRIPTION

The TT051-A is an ultra compact, active loudspeaker designed specifically for high quality indoor nearfield sound amplification. It is equipped with a 300 W digital amplifier, 150 W for the low frequencies and 150 W for the high frequencies. A powerful 5" neodymium woofer and a 1" aluminium dome tweeter loaded to a wide dispersion constant directivity horn provide an extensive coverage.



FEATURES

- 300 Watt, 2 way amplification
- Heavy duty multi-functional cabinet
- 5" low distortion woofer
- 1" titanium dome tweeter
- DSP processing
- Wall mount EQ, High pass EQ
- RDNet ready

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response:	65 Hz ÷ 20000 Hz
	Max SPL @ 1m:	116 dB
	Horizontal coverage angle:	110°
	Vertical coverage angle:	110°
Transducers	Dome Tweeter:	1.0"
	Woofer:	5.0", 1.0" v.c
Input/Output section	Input signal:	bal/unbal
	Input connectors:	XLR
	Output connectors:	XLR
	Input sensitivity:	-2 dBu/+10 dBu
Processor section	Crossover Frequencies:	1800 Hz
	Protections:	Thermal, Excurs., HF
	Limiter:	Soft Limiter
	Controls:	DSP Controlled
	RDNet:	Ready
Power section	Total Power:	600 W Peak, 300 W RMS
	High frequencies:	300 W Peak, 150 W RMS
	Low frequencies:	300 W Peak, 150 W RMS
	Cooling:	Convection
	Connections:	Powercon IN/OUT
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Baltic birch plywood
	Hardware:	Multi - Functional
	Handles:	Top, Bottom
	Grille:	Steel
	Color:	Black
Size	Height:	348 mm / 13.7 inches
	Width:	150 mm / 5.91 inches
	Depth:	190 mm / 7.48 inches
	Weight:	7 kg / 15.43 lbs
Shipping informations	Package Height:	424 mm / 16.69 inches
	Package Width:	294 mm / 11.57 inches
	Package Depth:	214 mm / 8.43 inches
	Package Weight:	8 kg / 17.64 lbs



PART NUMBER

• **13000244**

TT051-A

115V


EAN 8024530008925

• **13000243**

TT051-A

220-240V

EAN 8024530008918

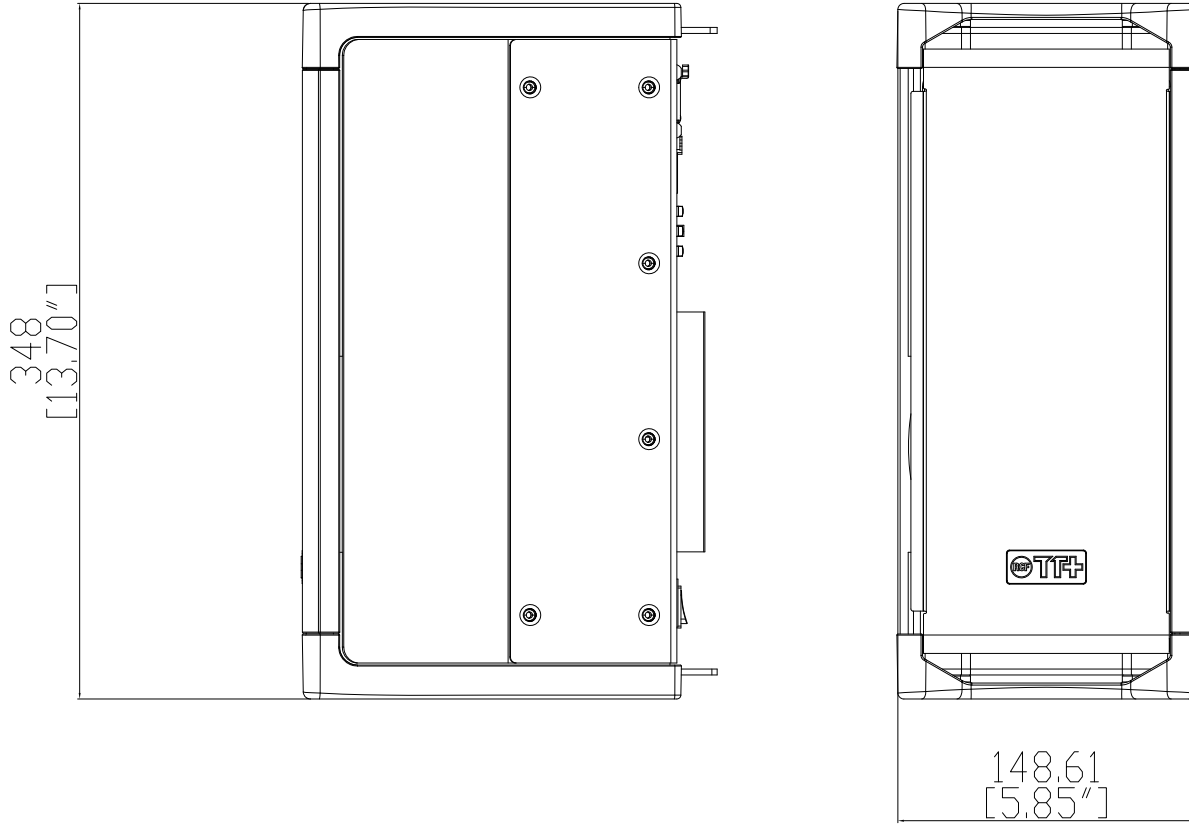

TT051-A

