

Signal Beacon

NE-A

New

Φ56 mm	LED	Indoor Use	Mounting in All Directions	Ambient Temperature -30C~+50C NE-24A	Ambient Temperature -25C~+60C NE-M1A	Red, Amber, Green, Blue, White, Multi-color: 7 colors
Continuous On	Blinking M1AN	88dB	2 Alarm Sounds	Touch Sensor M1ATB	CE	RoHS 10
UL	FCC *1	ICES *1	KC *1	IP67 (M1ANN)	IP65	NEMA TYPE 4X,13



Single Color



Multi-Color



Multi-Color / Buzzer / Touch Sensor

*1. NE-M1A only


Model Number Configuration

NE-24A-R




① Rated Voltage 24 = 24V DC	② Color R = Red B = Blue Y = Amber C = White G = Green
--------------------------------	--

NE-M1ATB-M




① Rated Voltage M1 = 12 - 24V DC	② Touch sensor T = Touch sensor N = No touch sensor	③ Buzzer B = Buzzer N = No Buzzer
④ Color M = Multi-color		


Dimensions (mm)




A Cable exit hole (Φ16)
With cable gland (Φ26)



B Mounting screw holes (2-Φ4.5)
M4 screws
(Tightening torque : 0.6N · m)



UL2464 AWG24 × 7 line color:
Red/Green/Blue/ Amber/Purple/Pink/Gray

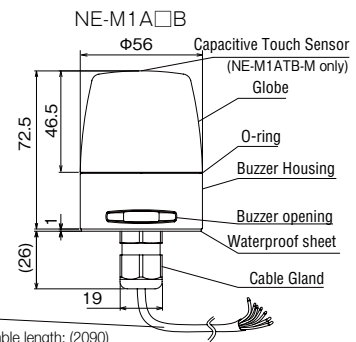

* Cable length: (2090)

Product List

Model Number	Rated Voltage	Touch Sensor	Alarm	Luminous Color	Power Consumption	Mass
NE-24A-R	24V DC	None	None	Red	0.7W	0.06kg
NE-24A-Y	24V DC	None	None	Amber	0.7W	0.06kg
NE-24A-G	24V DC	None	None	Green	0.7W	0.06kg
NE-24A-B	24V DC	None	None	Blue	0.7W	0.06kg
NE-24A-C	24V DC	None	None	White	0.7W	0.06kg
NE-M1ANN-M	12 - 24V DC	None	None	Multi-color (7 colors)	1.2W	0.15kg
NE-M1ANB-M	12 - 24V DC	None	Yes	Multi-color (7 colors)	1.8W	0.17kg
NE-M1ATB-M	12 - 24V DC	Yes	Yes	Multi-color (7 colors)	1.8W	0.17kg

Specification

Supported Transistors	24 : NPN/PNP, M1 : NPN
Alarm Sound	2 sounds (Intermittent, continuous)
Volume Control	None

Optional Parts

For details refer to P. 93 to P. 98

Product Name	Model Number
Pole Bracket	NE-001D
Wall Mount Bracket	NE-002D