


## Care and cleaning KOMFORTEX Slabs

- KOMFORTEX slabs are nearly maintenance-free unlike loosely poured sand or park mulch.
- Regular cleaning of your installed KOMFORTEX surface will promote a long useful life as well as attractive appearance.
- Impurities can be cleaned with a soft-bristled broom or vacuuming with an industrial vacuum cleaner.
- If moss and algae to result from atmospheric exposure, is recommended to use a high pressure water cleaner until 200 bar without chemical additives!
- Attention! The water pressure must be not too high.
- The distance of water jet to the surface area should be minimum 30 cm and the water temperature not higher than 80°C.
- This cleaning of surface is to be made one time yearly.
- Adherent impurities can be excluded with water and a scrubber.
- It is possible to use a dilution soap suds.
- After cleaning is recommended use water as a chaser.
- If it is necessary removal snow at winter, keep in mind that the coating not breaks down by sharp-edged or to be overweight machinery or implements.
- The application with commercial, allowed de-icing salt won't hurt the coating.
- Attention! Don't use solvent based cleansing material. They can damage the coating.
- KOMFORTEX slabs are an economical solution for any application due to their extreme durability and ease of maintenance.

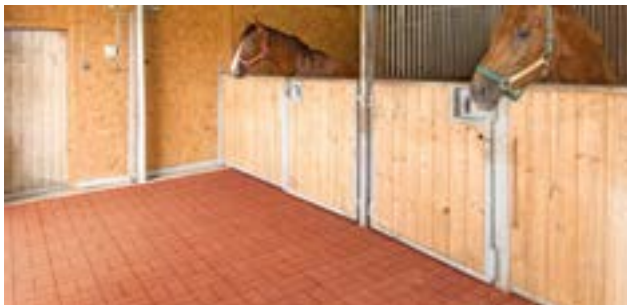

**Visiting address:**  
Stillestorps Industriväg 8  
443 61 Stenkullen

**Postal address: Vibisol AB**  
Box 3037, 443 03 Lerum

**Phone: 0302-770130**  
**E-mail: [info@vibisol.se](mailto:info@vibisol.se)**  
**Website: [www.vibisol.se](http://www.vibisol.se)**