




WILLBRANDT eIBe 401 / eIBe 401

Eigenfrequenz zwischen 7 Hz und 13 Hz
 Lagerlast von 30 kg bis 475 kg


Natural frequency between 7 Hz and 13 Hz
 Load range 30 kg up to 475 kg

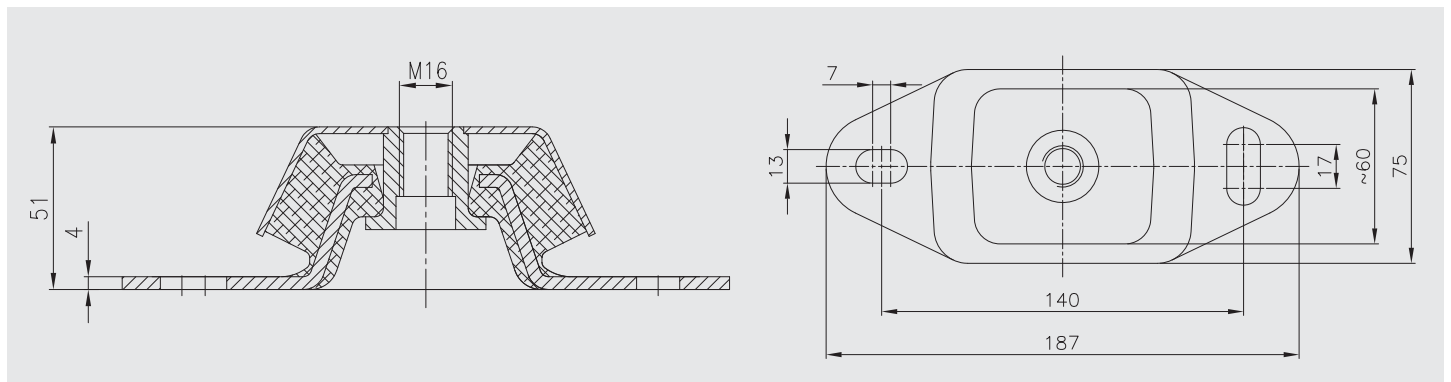

Grunddaten / Basic data

Härte Hardness	Statische Federrate Static spring rate [N/mm]	Lastbereich [kg] Load range [kg]		Höhe Height [mm]	Gewinde Thread	Max. statische Einfeldung Max. static deflection [mm]
		min	max			
1	264,0	50	135	51	M16	5,0
2	322,0	60	155	51	M16	5,0
3	513,0	90	240	51	M16	5,0
4	689,0	120	350	51	M16	5,0
5	1065,0	170	480	51	M16	5,0

Montagehilfe beachten. / Note assembly aid.

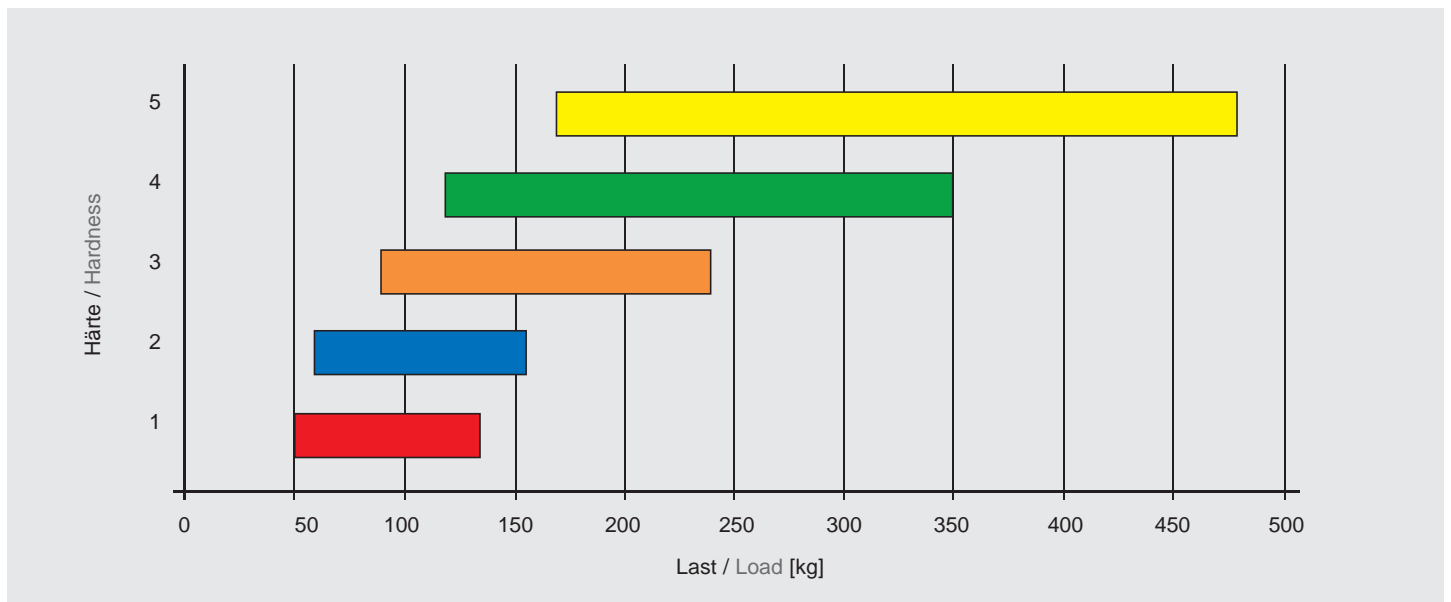


Zubehör / Accessories



Nivellierspindel und Scheibe / Level spindle and washer

Nummer Number	Mx	My	l [mm]	SW A/F [mm]	s [mm]	A [mm]
1	M12	M12	85	8	5	Ø 37/13 x 3
2	M12	M16	85	10	5	Ø 37/13 x 3
3	M16	M16	95	10	5	Ø 50/17 x 3
4	M20	M20	106	14	6	Ø 56/21 x 4

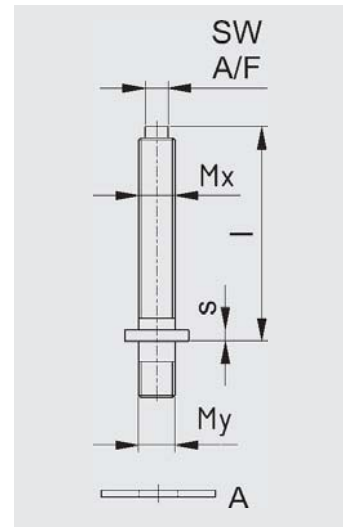


1 2 3



Feingewinde-Höhenverstellung / Fine thread height adjustment

Nummer Number	Mx	My	SW A/F [mm]	Zweilochmutterdreher (DIN 3116 A) Pin-type face wrench (DIN 3116 A) [mm]	Nivellierbereich Leveling range [mm]
1	M16	M16	41	50 x 5	±6
2	M16	M20	41	50 x 5	±6
3	M20	M20	41	50 x 5	±6

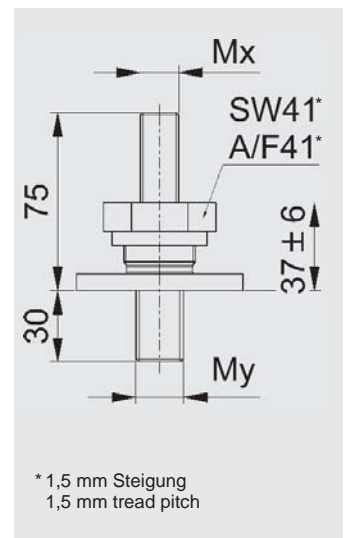

Gewicht 1,5 kg, Drehmoment bis 150 Nm / Weight 1,1 kg, turning moment up to 150 Nm