


# ValkPro+

## Installation manual

*Use in combination with the Project Report of the ValkPVplanner*

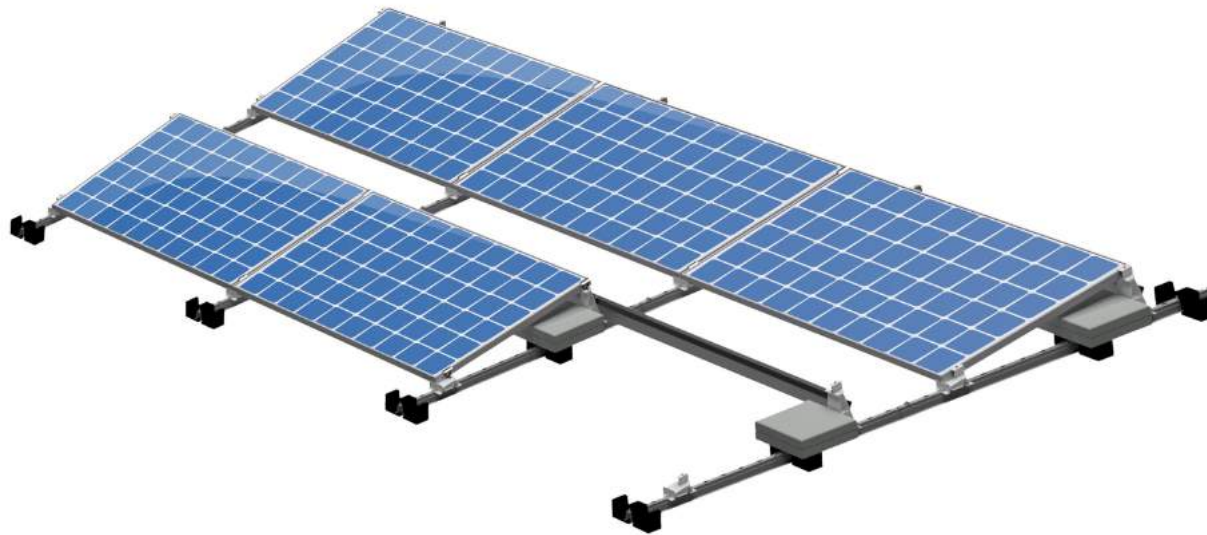

**Van der Valk Solar Systems**  
Solar Mounting Systems

**VAN DER VALK**



## Please Note

- This manual is not project specific.
- This manual is not legally binding.
- No rights may be derived from this manual.
- Use this manual in combination with the ValkPVplanner project report.
- Check 'Datasheet Cable management' for cable suggestions.
- The system can be placed both in the middle zone and edges of roof.
- Side panels are optional in the middle zone and mandatory in the edges of the roof.
- The need for mass carriers depends on the amount of ballast needed or when side panels are used.

## Table of contents

Disclaimer	Page -
Recommended tools for installing ValkPro+	Page 00
Mounting the Front and Rear Foot	Page 01
Mounting rubber tile carriers	Page 02
Placing roof carrier rows	Page 03
Placing ballast	Page 04
Placing mass carriers	Page 04B
Placing panels	Page 05
Mounting side panels	Page 06
Mounting back panels	Page 07
Disassemble front and rear foot	Page 08

# Table of contents

## ValkPro+

**Van der Valk Solar Systems**  
Solar Mounting Systems

**VAN DER VALK**



## Disclaimer

This installation manual must be seen in addition to the project report which shows you specific information about your project like a project drawing and ballast plan for flat roofs.

The project report is a result of the calculation tool, the ValkPVplanner. This online calculation tool and/or the project reports derived from this tool were composed with the greatest possible care. Nonetheless, it is possible that some information might not be entirely correct as the results for each project report can be based on default values, which values always need to be checked by you. The instructions provided in this project report must be observed at all times. All applicable standards and appendixes have been integrated in this online calculation tool.

All current structural, safety and building regulations must be observed. Solar mounting systems installed on roofs will be exposed to wind and snow. The building in question will be subject to a load as a result of the PV system. A design calculation must be used to establish whether or not the building will be able to withstand the extra load. Where necessary, modifications need to be made.

Flat roof systems should either be attached to the roof or need to be supported by ballast, to make sure that the system is unable to be lifted or tipped over. The ballast specified in the ValkPVplanner project report will be vital to ensure that the mounting system can be used. Flat roofs with an angle above 5 degrees must be attached to the roof.

The calculations in the online calculation tool do not take into account obstacles in the near surrounding like high buildings, cliffs and mountains. Restrictions also apply for the position of the system on a roof. The solar panels must be installed at a certain distance from edge of the roof as shown in this project report and the installation manual.

The standard warranty for pitched roof, flat roof and ground mount systems is 10 years, which can be extended under certain conditions. The guarantee provided is subject to the guarantee conditions stated in the general terms and conditions stipulated by Van der Valk Solar Systems B.V. Our terms and conditions shall apply to all our products and can be found on our website: [www.valksolarsystems.nl](http://www.valksolarsystems.nl).

Van der Valk Solar Systems B.V. does not accept any liability for any direct and/or indirect consequences of any act (or omission) ensuing from the information in or the failure to observe the instruction provided in the project report and the installation manual and for possible incorrect results resulting from the use of this online calculation tool which was made available to you.

The mounting system is a product that has been produced by:  
Van der Valk Solar Systems B.V.,  
Registered with the chamber of commerce for  
Haaglanden under number 27355116.  
Internet: [www.valksolarsystems.nl](http://www.valksolarsystems.nl)

Issue date: april 2017:  
Version: General user instructions v2 EN

**Van der Valk Solar Systems**  
Solar Mounting Systems



# Recommended tools for installing ValkPro+

VAN DER VALK



SOLAR SYSTEMS


Installation tools:



Cordless drill  
(for socket 13 and bit T-30)




Socket 13




Torx bit T-30


Optional  
installation tools:

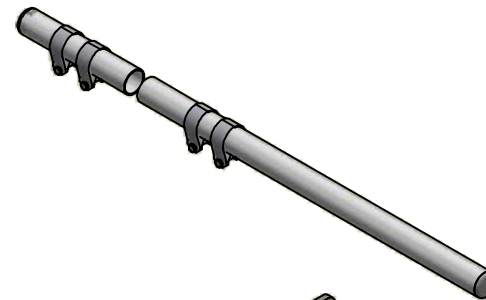

Alignment set  
(74.32.20)

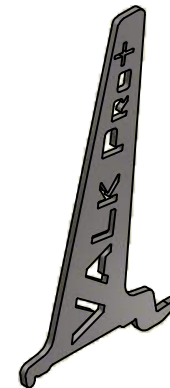

Disassembly key  
(74.30.00)

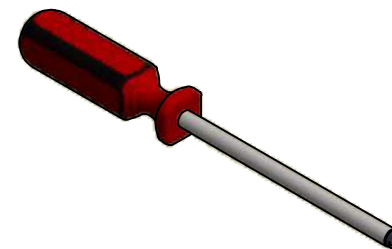


Screw driver  
(max shaft: Ø6mm)


# Mounting the Front and Rear Foot



- 74.18.01500
- Side:
  - 72.46.51
  - 72.46.61
- Middle:
  - 72.46.50
  - 72.46.60

The ValkPro+ side / middle feet require the same installation method.

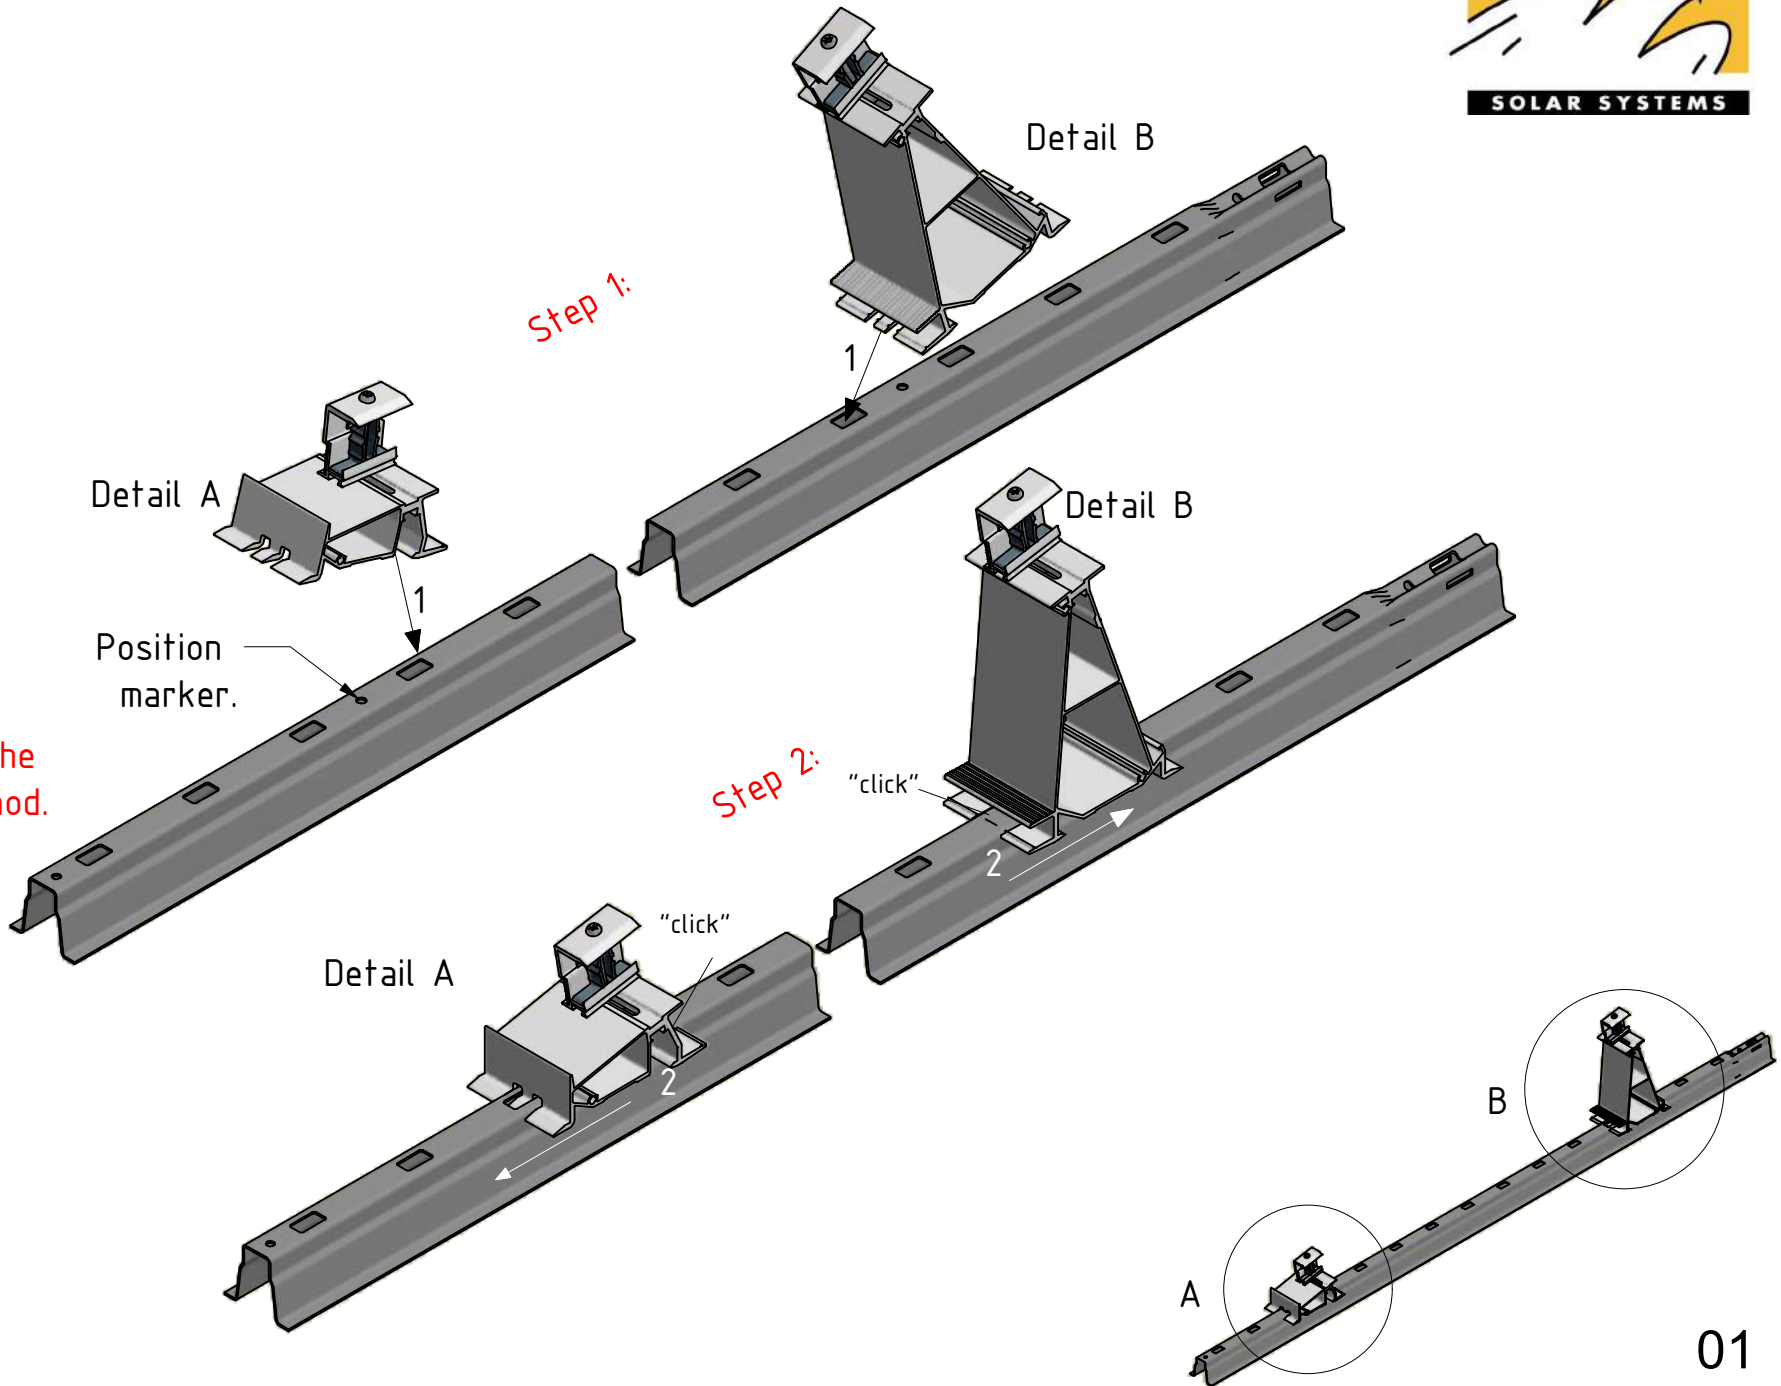



72.96.25

## Mounting rubber tile carriers

**VAN DER VALK**



**SOLAR SYSTEMS**

Detail A

Mount the rubber tile carrier on the roof carrier.

200

Text

A

A

For coupling roof carriers see Page 03

"Roof carrier row"

Text

Text:


On the front and back of a roof carrier row an extra rubber tile carrier needs to be placed.



Placing roof carrier rows




77.42.21




74.32.20  
(optional)


Detail A

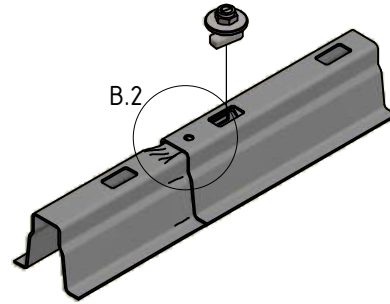

Detail A

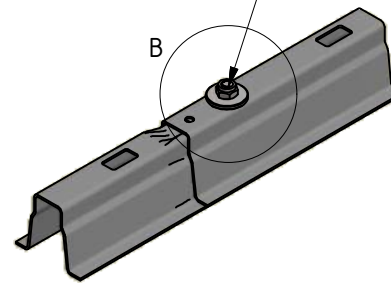


Detail B.2





Use the holes at the coupling for aligning the roof carriers. For example use a screw driver.

The groove of the bolt corresponds with the orientation of the bolt head.

Detail B



Detail B

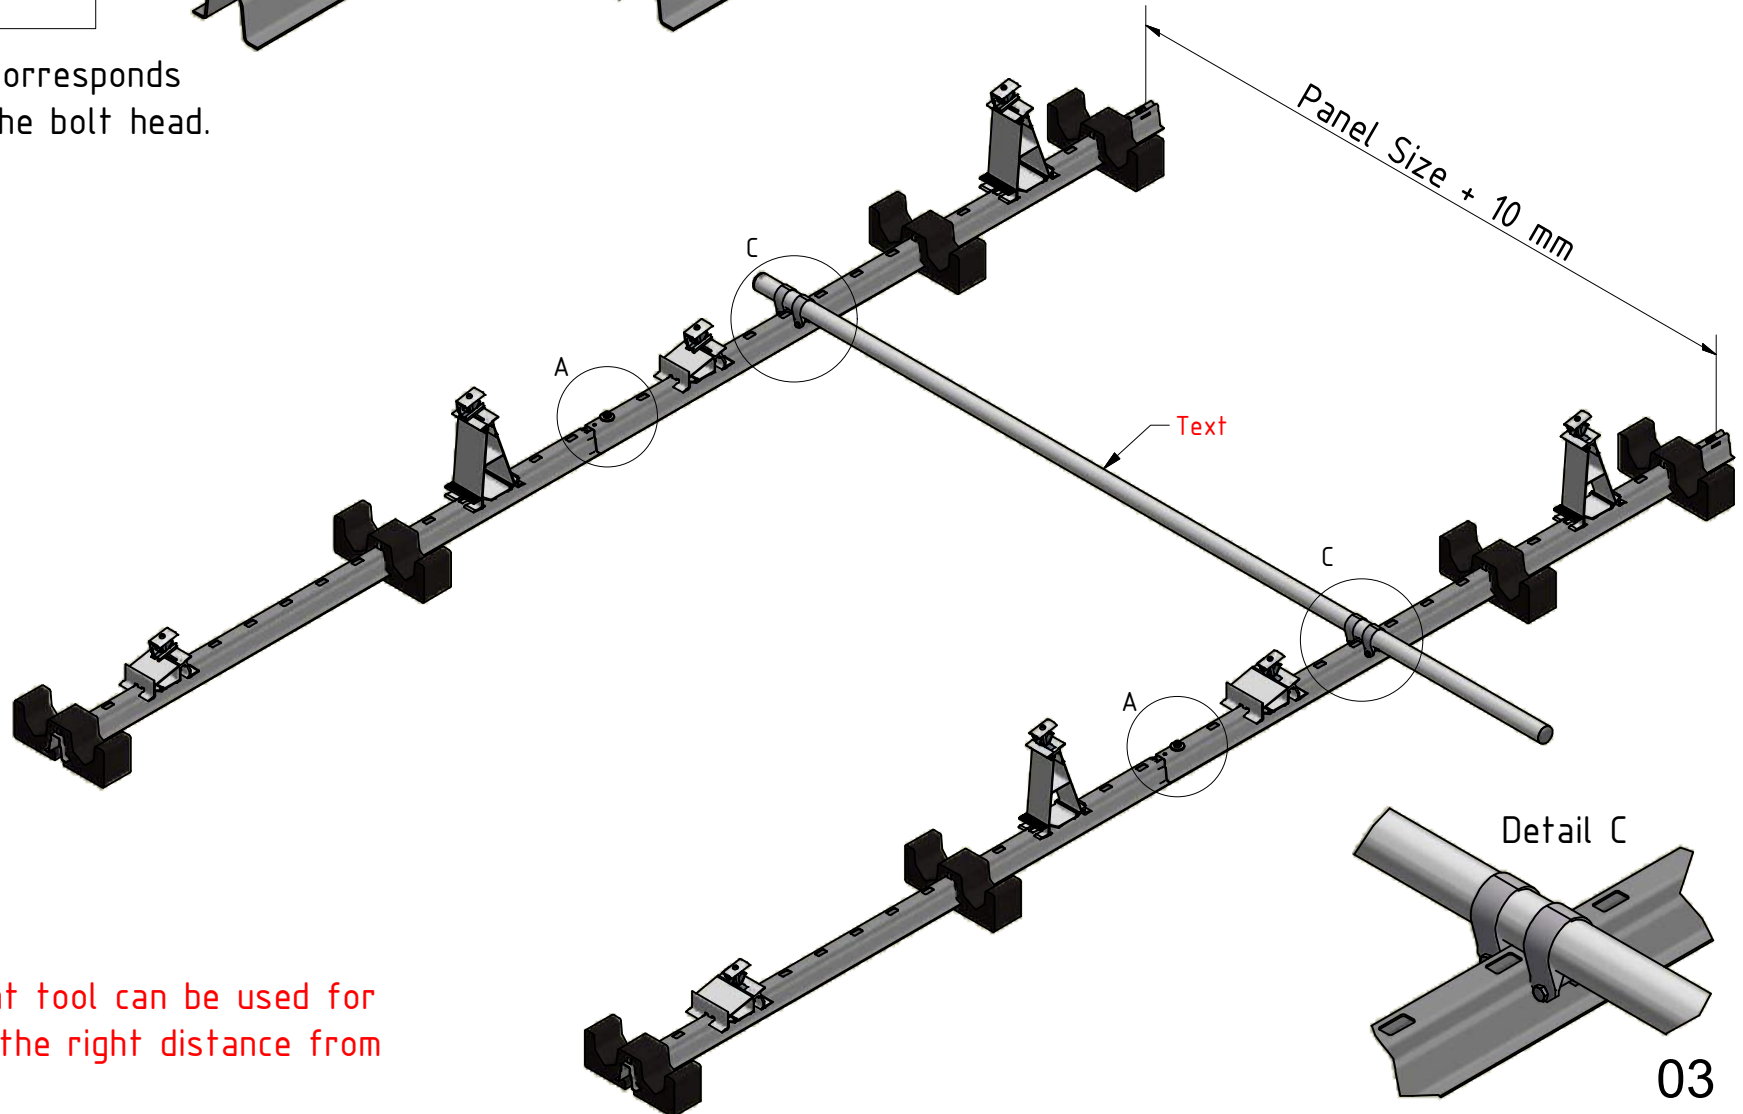

**Text:**  
The optional alignment tool can be used for spacing the rows on the right distance from each other.

Optional supplied by Van der Valk Solar Systems






75.06.30.30.45  
(300x300x45 mm)



75.06.30.15.45  
(300x150x45 mm)

## Placing ballast

Detail A

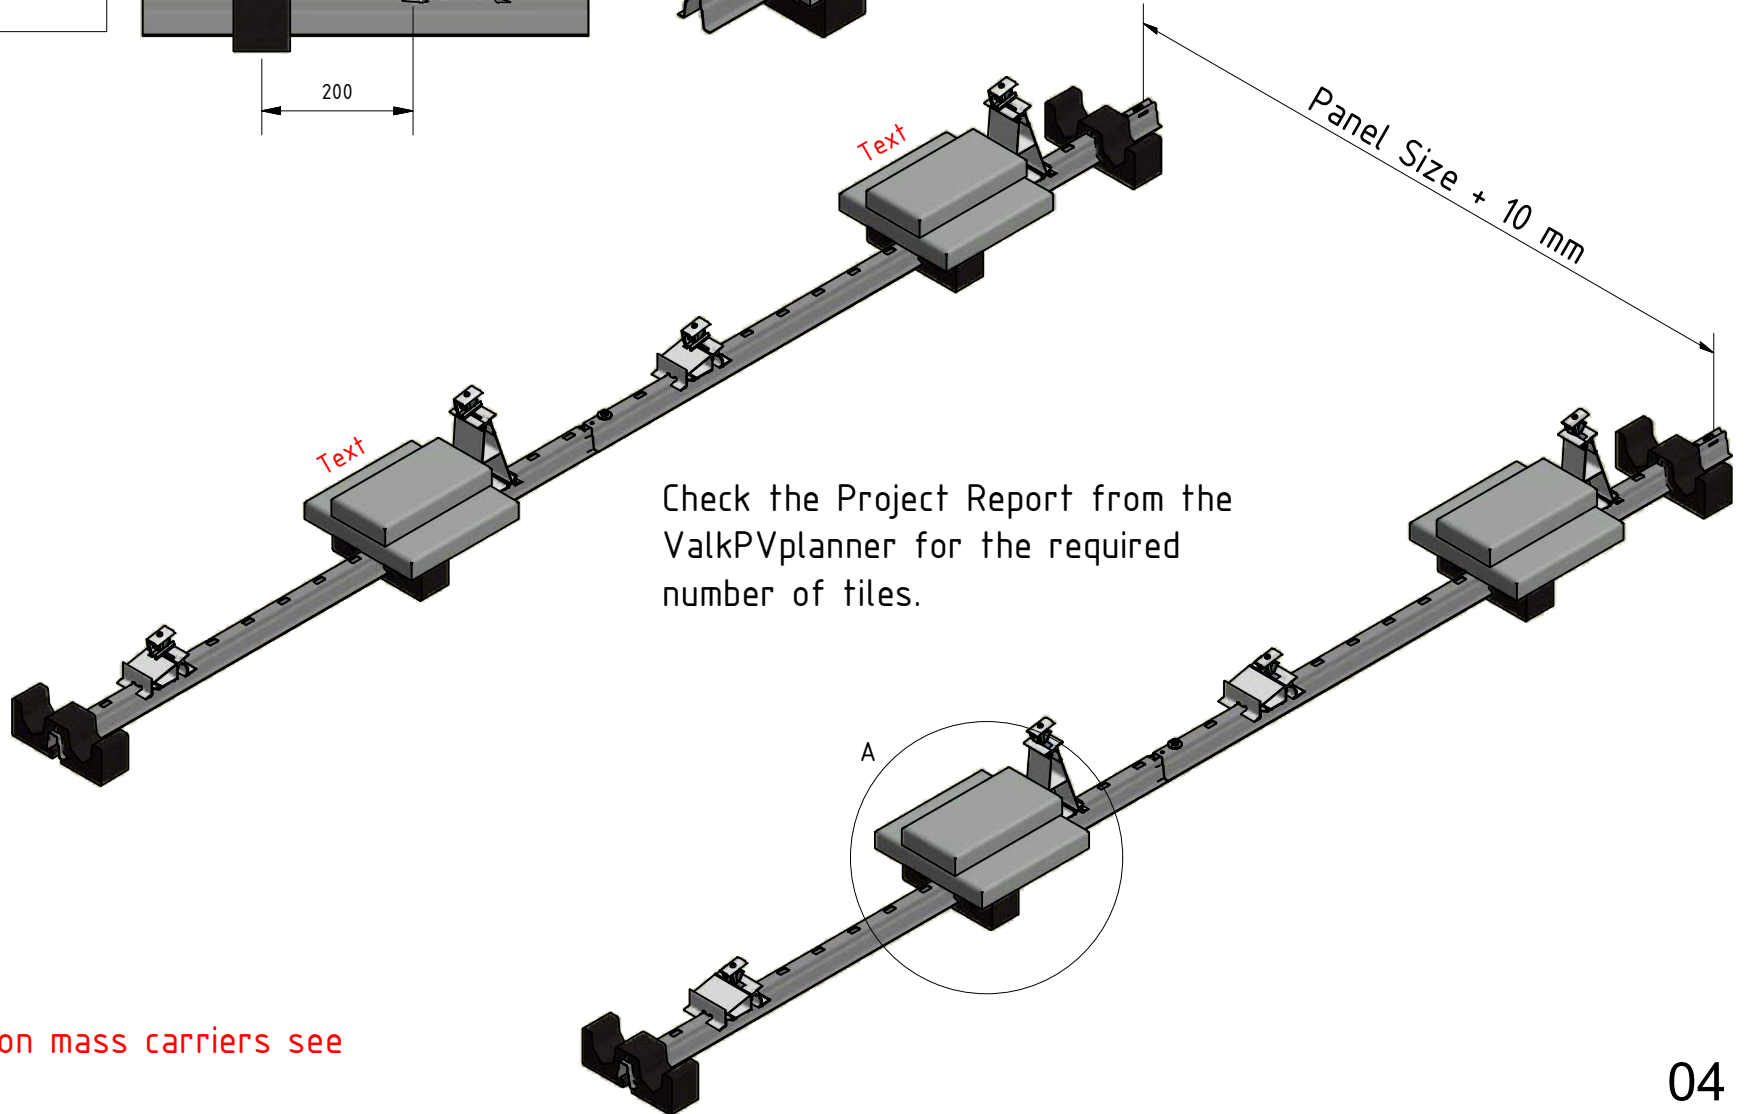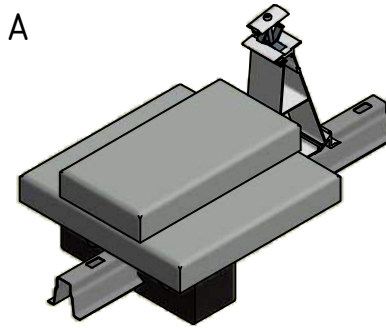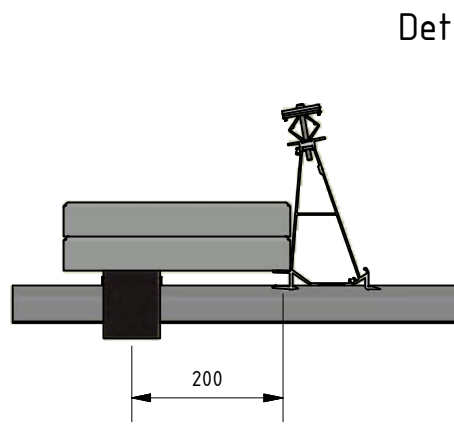

Check the Project Report from the  
ValkPVplanner for the required  
number of tiles.

**Text:**  
For placing the ballast on mass carriers see  
page 04B.








### Placing mass carriers


View A

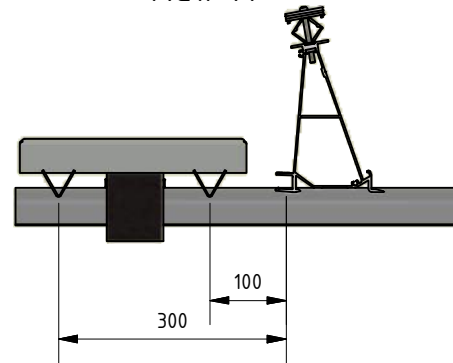

For mounting side panel see page 06.

Panel size + 10 mm


Check the Project Report from the ValkPVplanner for the locations of the mass carriers.

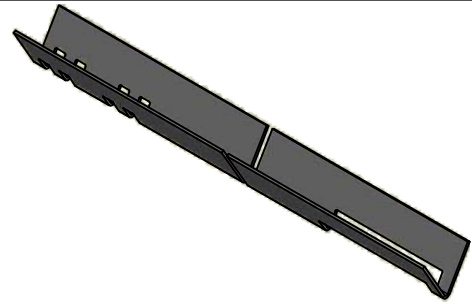

74.25.50 for panel L=1559-1690mm  
74.25.55 for panel L=1900-2100mm

Detail B



Detail B.1

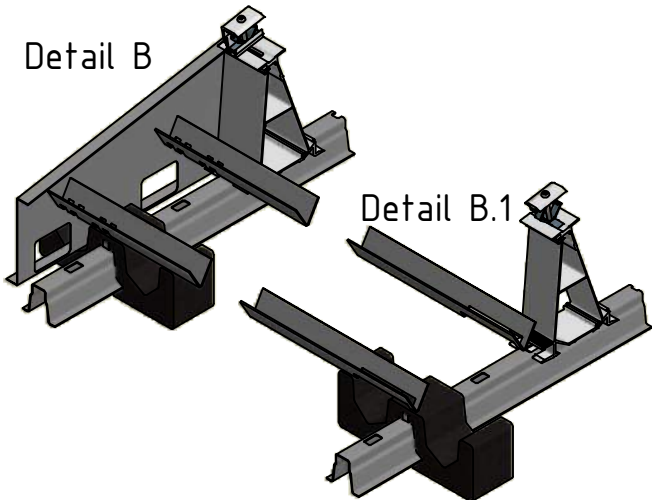

The mass carriers are mandatory on the panels where side panels are mounted. (except if there is no ballast required)





Placing panels

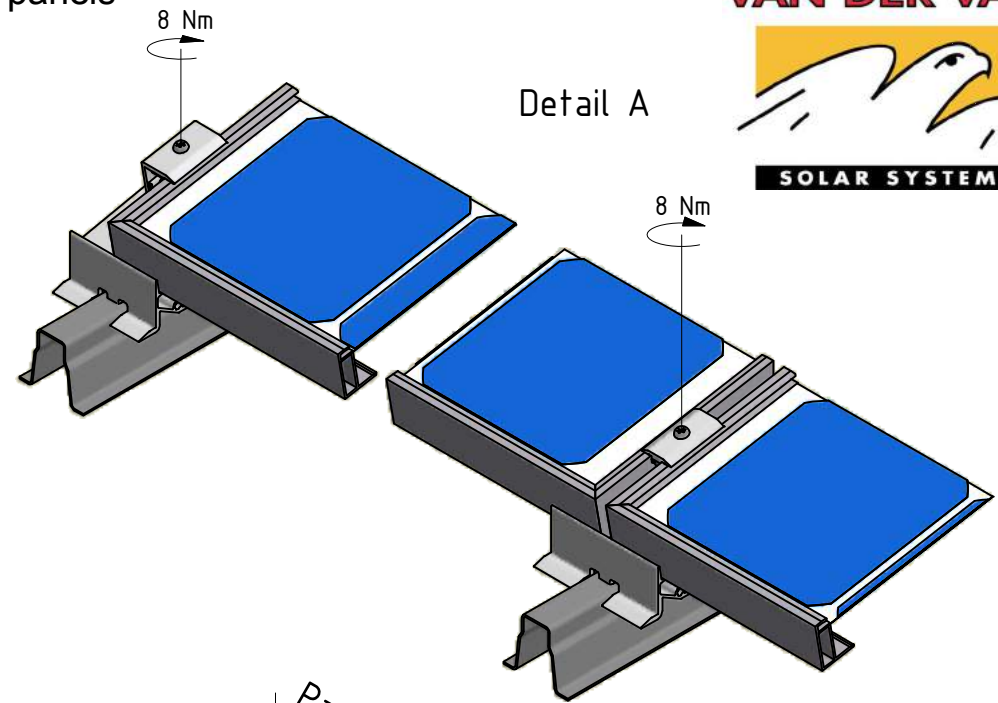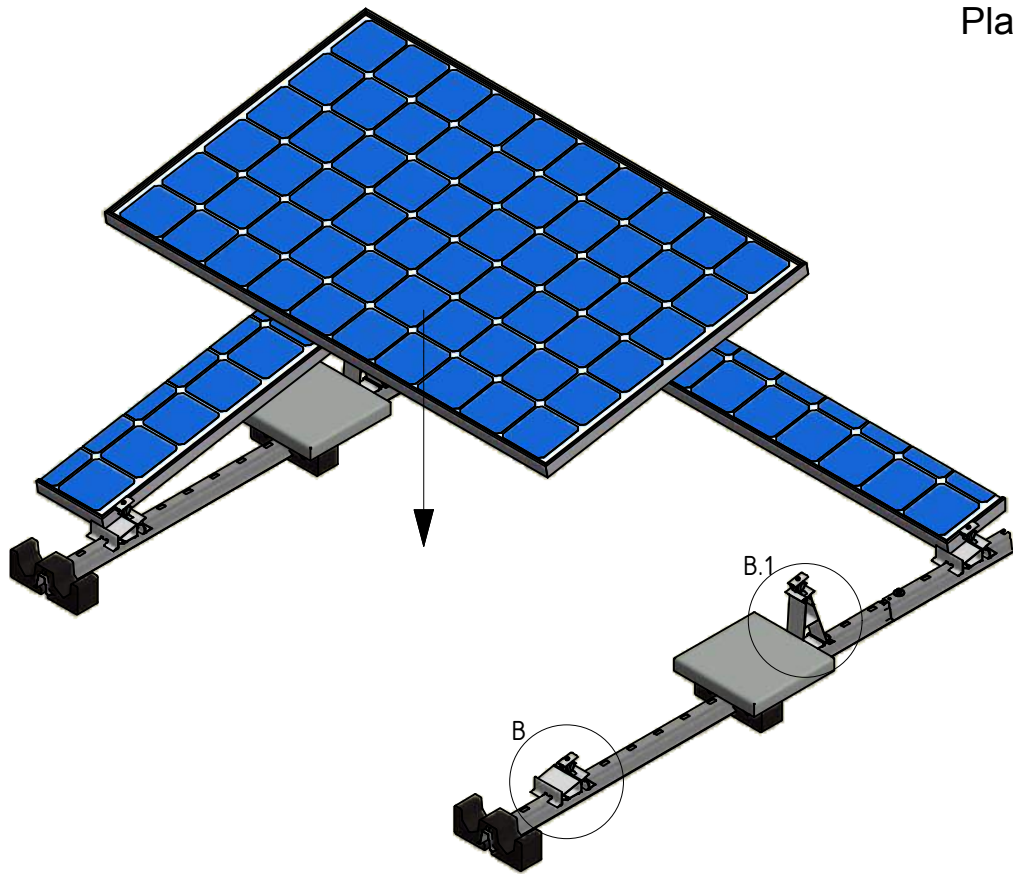

Detail A

Detail B

Detail B.1

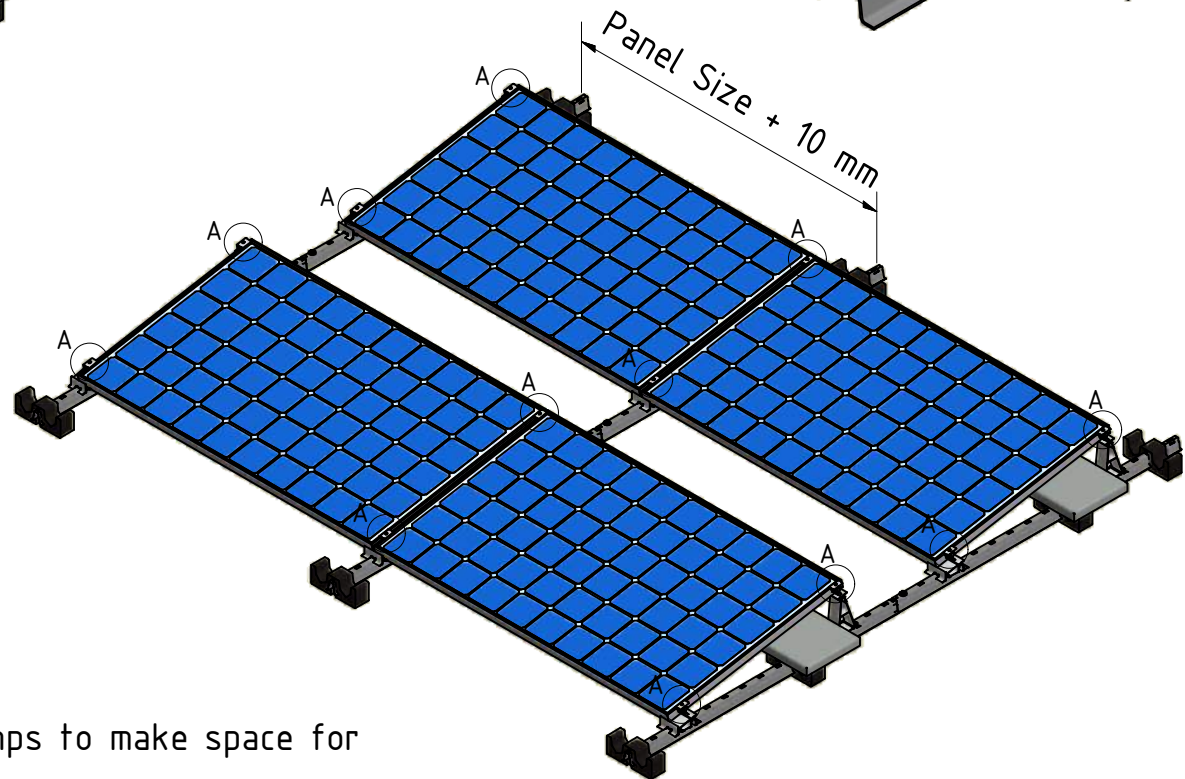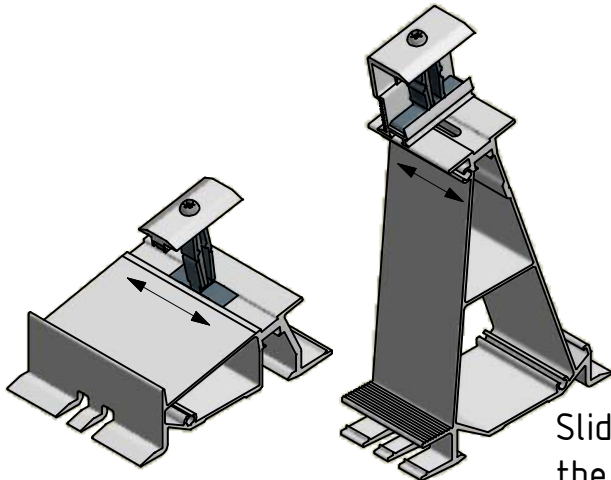

Slide the clamps to make space for the panel.



Mounting Side panels

Left:  
74.25.30

Right:  
74.25.31

77.33.20

Detail A

8 Nm

Right Side panels

Panel Size + 10 mm

Right Side panel


Left Side panel

A


A

Left Side panels.

Please Note!!  
When using side panels the ballast must be placed on mass carrier in stead of the rubber tile carriers.

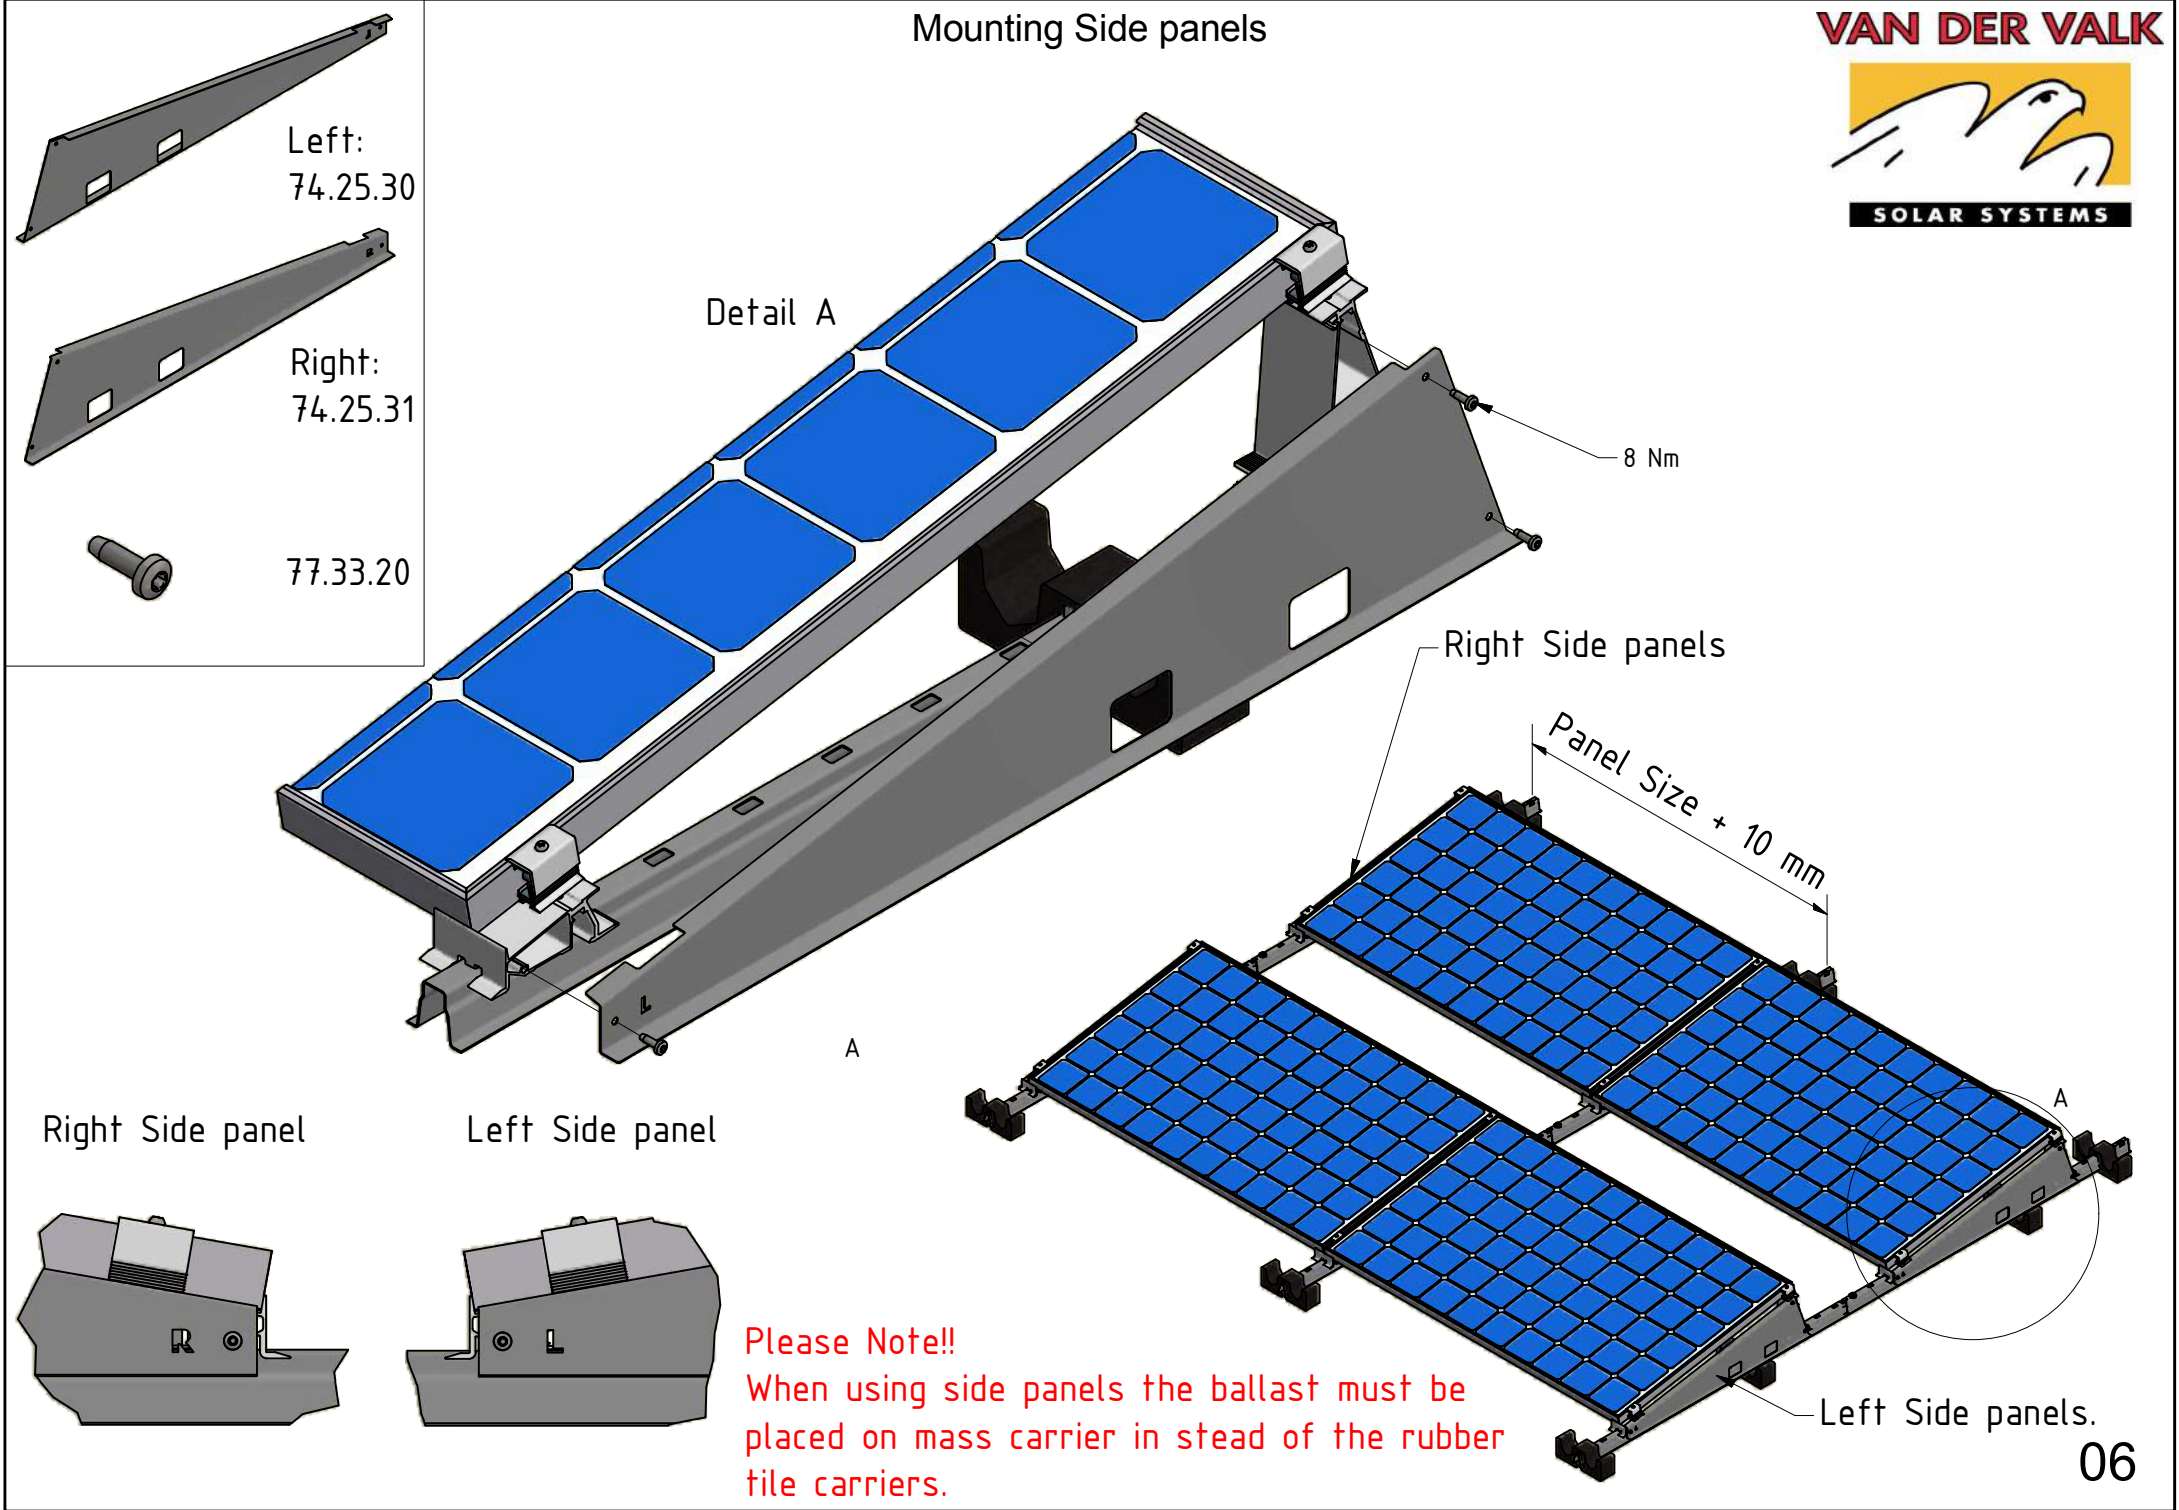

# Mounting back panels


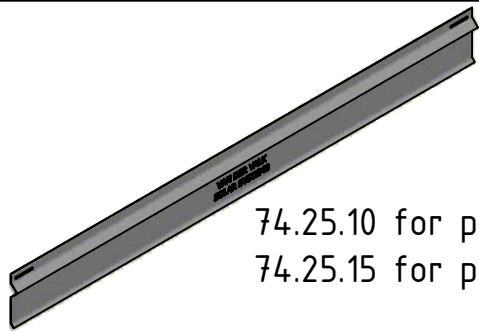


74.25.10 for panel L=1559-1690mm  
74.25.15 for panel L=1900-2100mm





77.33.20

Detail A.1

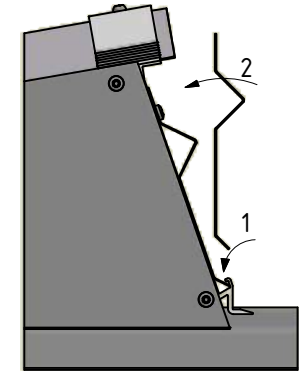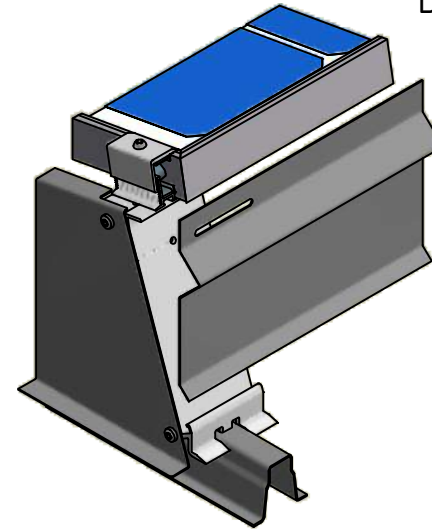

Detail A.2

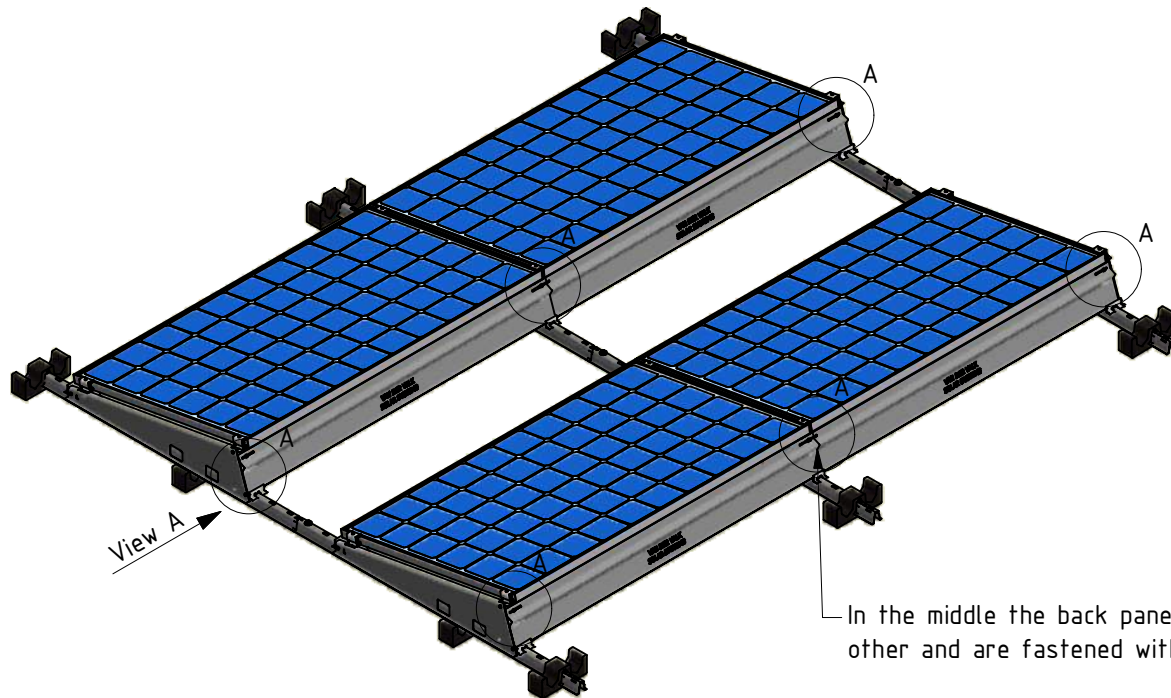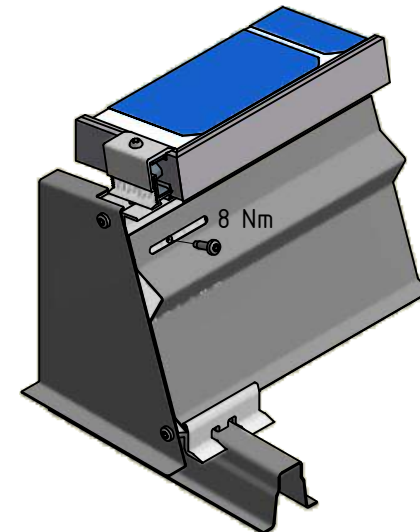

In the middle the back panels overlay each other and are fastened with 1 Torx screw.



74.30.00  
(Optional)


## Disassemble front and rear foot

**VAN DER VALK**




**SOLAR SYSTEMS**

Detail A




Use the disassembly key to push the middle lock tab down. Now the foot can be removed.





Step 1

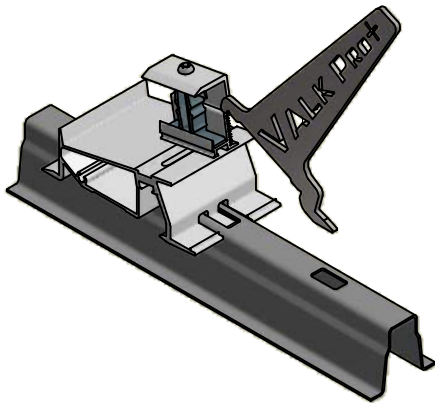

Step 2

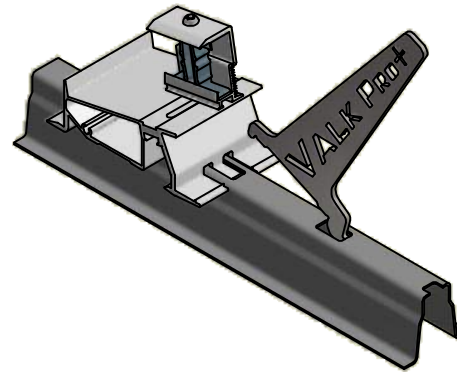

Step 3

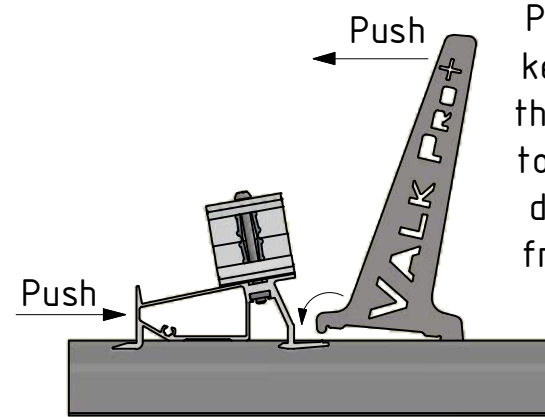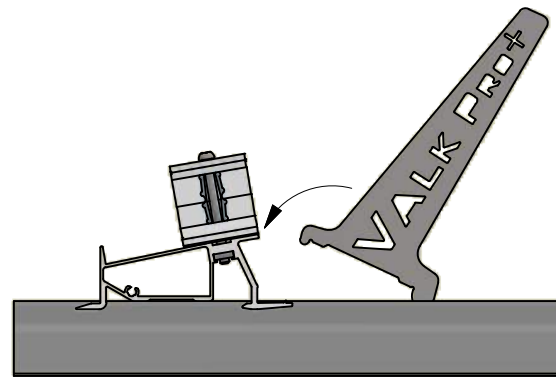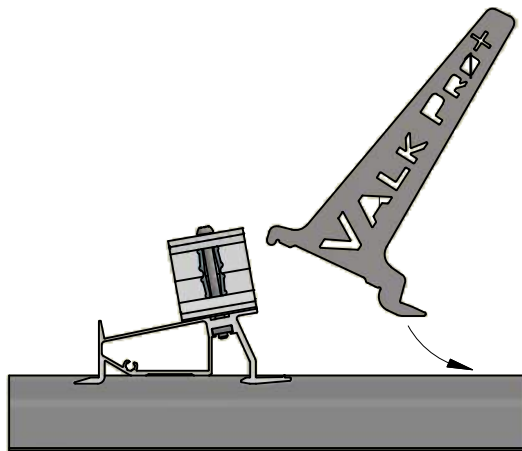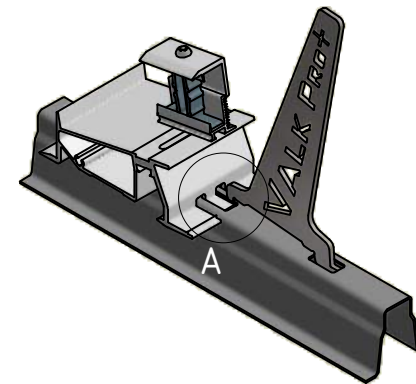

Push the disassembly key simultaneous with the front or rear Foot towards each other to disassemble the foot from the roof carrier.

## Van der Valk Solar Systems

Van der Valk Solar Systems is one of the fastest growing companies in the solar industry. It concentrates solely on developing and manufacturing solar panel mounting systems for pitched roofs, flat roofs and open fields. Van der Valk Solar Systems also has an office and warehouse located in the UK.

Our mounting systems are developed and manufactured in our own factory in the Netherlands and are distinguished by their versatile application, very fast mounting and top quality. They comply with the latest Eurocodes and thus meet the requirements set by banks and insurance companies for solar systems.

Van der Valk Solar Systems works closely together with Van der Valk Systemen, which since 1963 has upheld an international reputation in the field of mobile systems and fixation components.

Our joint industrial complex includes 20,000 m<sup>2</sup> of offices and industrial buildings. By using modern machinery and the latest technology, products and systems can be developed, manufactured and tested quickly and precisely.

### Developer and producer of solar mounting systems for:



Pitched Roofs



Flat Roofs



Open fields



Greenhouses



Water Features

Please contact Van der Valk Solar Systems, your installation company or project organisation for full information.

### Why choose Van der Valk Solar Systems?

- Innovative systems developed in compliance with applicable worldwide standards
- Fast and reliable deliveries thanks to modern machinery and large stocks
- System supplier since 1963
- Free software for project design and project calculation
- All systems applicable to any type of roof or surface
- Quick assembly thanks to premounting of essential components
- All systems available in portrait as well as landscape configuration
- Various systems also available as ready-to-use kits



Zwartendijk 73, 2681 LP Monster  
Nederland  
T +31 (0)174 21 22 23  
F +31 (0)174 24 27 27  
info@valksolarsystems.nl  
www.valksolarsystems.nl

Innovation House, Discovery Park  
Ramsgate Road, Sandwich CT13 9FF  
United Kingdom  
T +44 (0)1304 897658  
info@valksolarsystems.co.uk  
www.valksolarsystems.co.uk

# Van der Valk Solar Systems

## Solar Mounting Systems

**VAN DER VALK**



**SOLAR SYSTEMS**