




Cubiscan 325

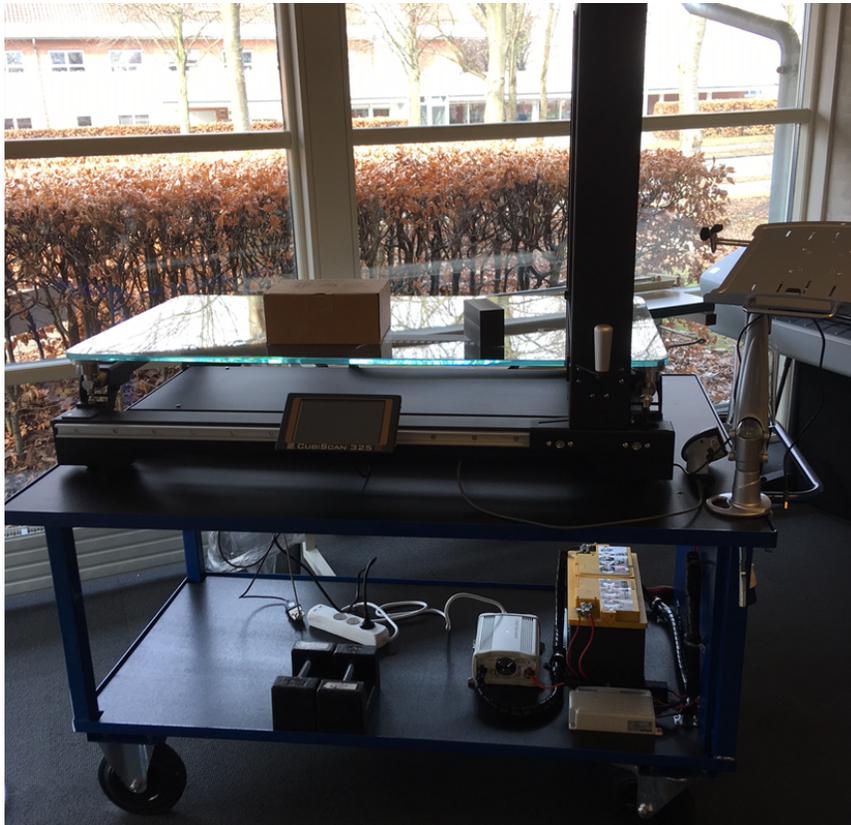

Introduktion

Produktet Cubiscan 325 er forhandlet i Danmark, Sverige og Finland af Uscan ApS. Udstyret udregner automatisk længde, bredde, højde og vægt på irregulære og regulære vare eller kasser.



Produkts beskrivelse

Til genstande indenfor vægt og dimension, denne alsidige model anvender infrarød lysnet der skanner vare i alle vinkler med 360 grader, og har 4 vægt celler fordelt i hvert hjørne af skanneren. Skanneren kan anvendes oftest i traditionelle distribution miljø til indgive master data om varernes kvadrat forme volumen fylde om så vare er af mere irregulær eller regulær form, men kan også ved at anvende Cubiscan 325 mindre størrelse mindre anvende den i test miljø.

Cubiscan 325 giver dig total kontrol i datafangstprocessen. Det giver dig mulighed for hurtigt og konsekvent at indsamle produktoplysninger (vægt og størrelse) der er ikke behov for et ekstra værktøj, ingen plads til menneskelig fejl, ingen grund til at indtaste data og ingen fejldata. Og oplysningerne overføres let til dit databehandlingssystem, hvor det kan bruges med det samme. Cubiscan 325 volume og vejningsenhed betjenes i forbindelse med en leveret eller egen laptop / pc, men kan også bruges som en selvstændig enhed i kraft af det integrerede LED display og kontrolpanel.

Det maksimale måleområde af uregelmæssige formede genstande er på 900 x 600 x 600 mm, hvor der anvendes af infrarøde sensorer. Den har en vægtkapacitet på 25 kg. Dimensioner måleopløsning er 1-2 mm. Vægttolerancen er på 2 g.

Hver enhed har tre aktive kommunikationsporte. Cubiscan 325 kan betjenes i en fast position eller kan udstyres med en vogn og bærbar strømforsyning til fuldstændig mobil drift. Cubiscan 325 benytter avanceret sensorteknologi, der er sikker for operatører og fragt, og kan integreres direkte med strejkode etiket scanning og udskrivende enheder.

Et års fabriksgaranti på dele og arbejdskraft er inkluderet, en vedligeholdelsesaftaler er muligt og en udvidede garanti hvor der opnåes op til 3 års garanti er også en mulighed.



Specifikationer

Fysiske specificationer	
Længde	125 cm
Bredde	97 cm
Højde	97 cm
Ydeevne	
Længde	90 cm
Bredde	60 cm
Højde	60 cm
Volume	tolerance 1 mm
Max	vægtkapacitet 25 kg
Vægt	tolerance 2 gram
Yderlige information	
Data output	Serial RS-232, Ethernet and USB
Volume sensor	360 grade infrarød lysnet
Vægt sensor	4 vægt sensor
Brugergrænseflade	Integreret display og tastatur /Qbit software
Strømkrav	95 - 3250 v, 50-60 Hz
Drift temperatur	0 til 40 grader
Fugtighed	0 - 90% ikke kondenserende

Oftest anvendt software

Qbit-DB er vores mest populære version af software, der ligger på en bærbar pc eller laptop, der er forbundet med Cubiscan. Den indfanger data lokalt og sender derefter informationen via FTP eller til den udpeget folder eller via ODBC. Alternativt kan dataene eksporteres manuelt til en hvilken som helst folder. QbitDB tilbyder også funktionaliteten til at optage billeder af produktet, der måles.

Qbit-Xfer tillader, at data fra cubiscan 325 overføres direkte til en kundes tilknyttet åbne program. Denne version af software er designet til kunder, der har et Windows-baseret system.



Kommunikation

Cubiscan 325 overfører længde-, bredde- og højde data samt andre diagnostiske data via EIA RS232-C kommunikationsprotokol. Dataene består af serielt kodede ASCII-tegn.

Garanti

En 12 måneders reservedelsgaranti er inkluderet i købsprisen. Denne dækning giver mulighed for udbedring af problemer via telefon/teamviewer/onsite og eventuelt udskiftning af defekte dele.

Dokumentation

Hver cubiscanner leveres med:

- En kopi af operatørens instruktioner.
- En kopi af operatørens instruktioner er tilgængelig online.
- En individuel manual med jeres software opsætning.

Laptop & PC krav

Alle versioner af Qbit software er designet til at fungere med følgende minimum computer krav.

Processor PC Pentium III processor eller bedre.

Hukommelse 256 MB RAM.

Harddisk 40 MB diskplads tilgængelig.

Skærm VGA 1024 x 768 opløsningsfarvevisning.

Operating System Windows 98, Windows NT, Windows 2000, Windows XP eller nyere.

Cubiscan enheden monteres til computeren via USB eller seriel forbindelse. Håndscanneren forbindes via en PS / 2-port eller USB-port.



Cubiscan new product limited warranty

Statement of Warranty. Subject and according to the Terms and Conditions set forth below, Quantronix, Inc., (hereafter referred to as “Quantronix”) warrants to the Buyer that its new product is in accordance with Quantronix published specifications (or those agreed upon with Buyer in writing) at the time of sale or lease, and that such product shall be free from defects in material and workmanship for a period of one year from, as applicable: the date of sale or the Commencement Date under a written equipment lease or rental agreement (the “Warranty Period”). For purposes of this warranty, the term “Buyer” shall mean and refer only to the party which originally – whether from Quantronix directly, or from a distributor, agent or reseller authorized by Quantronix – purchases, or leases under a written equipment lease or rental agreement, the Quantronix product which is the subject of this warranty.

Terms and Conditions of Warranty. This warranty is applicable exclusively to original equipment products, and components which were manufactured by Quantronix. Quantronix does not warrant, for any purpose, any part or component manufactured by another manufacturer, nor which is used or rebuilt. Quantronix’ obligation and liability under this warranty is expressly limited to repair or replacement (at its option) of the warranted equipment or components within the Warranty Period. A purchase by Buyer of equipment which it had first leased or rented shall not start a new Warranty Period.

In the event of the occurrence of a claim under this warranty, the Buyer shall have a duty to promptly notify Quantronix in writing of the nature and specifics of the claimed defect. Failure to so notify shall void this warranty. Any claim of a warrantied defect is subject to inspection and analysis by Quantronix to conclusively identify or confirm the nature and cause of failure and application of this warranty. Any defective components, mechanical or electrical, will be repaired or replaced, at the discretion and authorization of Quantronix, at Quantronix’ facilities in Utah. It shall be the Buyer’s responsibility to return the faulty equipment or components to Quantronix at Buyer’s expense. Quantronix’ obligation shall not include transportation charges, nor labor, material, or service charges involved in the removal, return or installation of equipment or components.

Except as provided herein, Quantronix shall have no other obligation or liability due to defective equipment or components. Accordingly, but without limitation, Quantronix shall not be liable for: losses, injury or damage caused to persons or property by Quantronix products or their failure; indirect, special or consequential damages of any nature including but not limited to loss of profit, delays or expenses, such as those arising from the use of or inability to use the products; nor any incidence of personal injury or property damage arising from the negligence or willful act of anyone other than itself or its employees.



Conditions Which Void Warranty. This agreement shall not apply to equipment or components which has/have:

- A Been the subject of repairs or modifications not authorized by Quantronix.
- B Not been operated under normal use and service according to that for which it was intended.
- C Not been operated or maintained in accordance with Quantronix' printed instructions.
- D Been subject to misuse, negligent handling, improper installation, accident, damage by fire, submersion, or act of God.
- E Had serial numbers altered, defaced or removed.
- F Been sold, loaned, leased, subleased or in any other way transferred to or placed within the control of any party other than the Buyer.
- G Been operated beyond capacity.

THE FOREGOING IS IN LIEU OF ALL OTHER REMEDIES, GUARANTEES, LIABILITIES OR WARRANTIES. QUANTRONIX MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, AND MAKES NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

This statement sets forth the full extent of Quantronix' liability for breach of any warranty or deficiency in connection with the sale or use of the product. No employee or representative of Quantronix is authorized to change this warranty in any way or grant any other warranty.

QU60101-100