

andio

MODEL: CC8



Product id: CC8D114

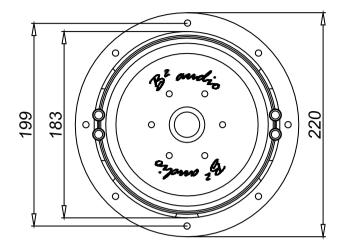



ENCLOSURE SUGGESTIONS

SEALED: 20 L / 0.706 cu.ft (net), Qtc 0.38

PORTED: 30 L / 1.059 cu.ft (net), Port area 75 cm² length 36 cm FB 42 Hz / F-3 dB 33.9 Hz

Power handling*:	750 W
Sensitivity (2.83 V/1 m):	87.3 dB
Nominal impedance:	Dual 1Ω
X-Max:	12 mm
Equivalent Compliance (Vas):	7.4 L
Free Air Resonance (Fs):	36 Hz
Electrical "Q" (Qes):	0.41
Mechanical "Q" (Qms):	5.53
Total Speaker "Q" (Qts):	0.382
DC Resistance (Re):	1.1 Ω



www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com www.facebook.com/b2audio

*It's essential that our speakers are given time to allow the suspension to soften up. Depending on use, this may take several weeks. While this process is undergoing, it is not recommended to apply full amplification power according to the speakers specs. Once the moving parts have been broken in, the performance of your speaker will increase. Abuse of the unit is **not** covered by warranty. The warranty does not cover (1) Speakers that have been used for spl purpose in competitions, (2) Damage caused by amplifier clipping or distortion, (3) Exposure to water, oil, solvent & excessive temperatures +/- (4) Transportation damages. (5) Cost of shipping to / from authorized service center.