



Jet Air Boy®



High blowing force, unblockable and low noise level

Blowgun equipped with a Jet Air 1 flat nozzle

The Jet Air Boy® combines all the best features. It is silent with only 81,5 dB at 8 bar and complies with OSHAs and EU's requirements in regards to noise level. The blowing force is high with 580 l/min. / 5,05 N at 8 bar, compared to most of the low noise level blowguns on the market. The construction of the nozzle secures that the nozzle is unblockable and therefore complies with OSHA STD 1-13.1 requirements.

The JW L ergonomic design is a classic in itself. We use the compressed air to ease the activating of the handle making it easy, accurate and simple to operate.

The Jet Air Boy® is produced in an impact-resistant acetal plastic (POM)

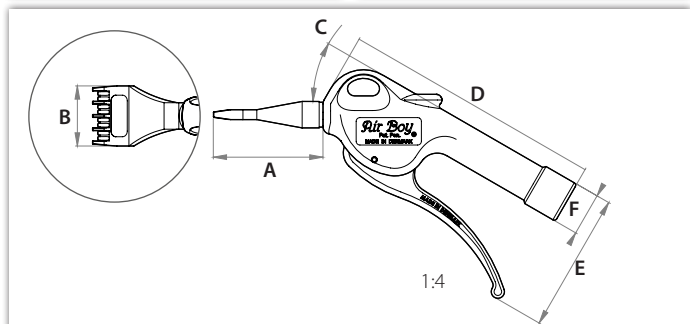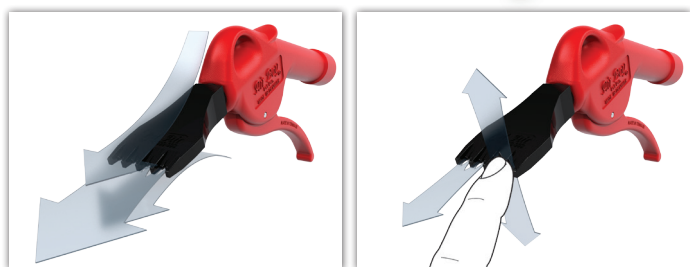

Dimensions

A	58 mm	C	30 °	E	73.6 mm	⊕	1/4 " BSP
B	31,8 mm	D	138 mm	F	∅ 22.6 mm		



25

Year Warranty
Jahre Garantie
ans de Garantie
años de garantía
års garanti

The durability of our blowguns is top notch - even after 28 million operations. Therefore, we are also proud to offer you a 25 year warranty on the valve system in your Air Boy® blowgun!

Materials		Specifications		Directives		
Handle and trigger	Acetal plastic	Max 8 bar	580 l/min (8bar)	2003/10/CE	Max 85 dB	OK
Valve	Acetal plastic	81,5 dB (8 bar), (78 db at 6 bar)	-10°C to +80°C	OSHA 1910.95 (b)	Max 90 dB 8 hr	OK
Gaskets / O-rings	Nitrile	~0,095 kg		OSHA STD 1-13.1	Max 30 psi when blocked	OK
Blowing tube & shaft	Acetal, Steel					
Spring	Hardened spring wire					

Flow	l/min(cfm) / bar(psi)	Noise level	dB / bar(psi)	Blowing force	Newton (g) / bar(psi)