


Cable Suspensions for Event Technology & Rigging

02/2018 


REUTLINGER Type 50 SV III, 66 SV III, 80 SV III

- time-saving
- simple use without tools
- infinitely adjustable

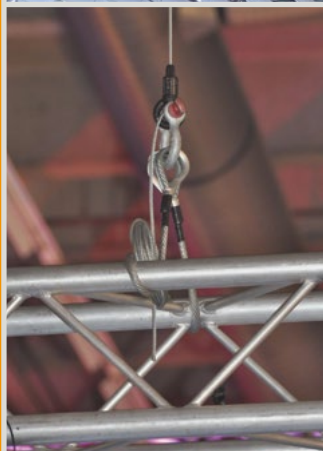

The complete range of "TÜV-GS"-certified cable approved for use within the scope of accident prevention regulation "DGUV Vorschrift 17" (formerly "BGV C1")

REUTLINGER®
systematic suspension



The Original

REUTLINGER cable grippers for event technology & rigging

These grippers – developed in cooperation with the industry's top experts – provide you with various crucial advantages:



- **One hand is sufficient**
The grippers are installed wholly without tools and are infinitely adjustable.
- **Complete integration into the stage setting**
Due to the non-reflecting black zinc coating the grippers are barely visible in stage- and fair-booth applications.
- **Secure load suspension**
Within the scope of standard DGUV Regulation 17 (BGV C1), the grippers can be loaded from 60 to 240 kg with 10-fold safety-factor.

Holder type 50 SV III - The range for 4.0 mm and 5.0 mm cables



Holder Type 66 SV III - The range for 6.0 mm and 1/4" cables



Holder type 80 SV III - The range for 6.0 mm and 8.0 mm cables





Holder type 50 SV III

- 1** Type 50 SV III Integral ring
Internal ring- \varnothing 30 mm
Ser. no. 393.005.033
- 2** Type 50 SV III ZW with ring
Internal ring- \varnothing 30 mm
Ser. no. 393.005.026
- 3** Type 50 SV III M12
Ser. no. 393.005.021
- 4** Type 50 SV III ZW M12i
Ser. no. 393.005.025
- 5** Type 50 SV III ZW with fork 14x28
and safety-bolt, Ser. no. 393.005.027
- 6** Type 50 SV III ZW with
DOUGHTY® coupler T58081
for tube diameter 48-51 mm
Ser. no. 393.005.040




Holder Type 66 SV III

- 7** Type 66 SV III Integral ring
Internal ring- \varnothing 35 mm
Ser. no. 393.007.701
- 8** Type 66 SV III ZW with ring
Internal ring- \varnothing 35 mm
Ser. no. 393.007.709
- 9** Type 66 SV III M16
Ser. no. 393.007.700
- 10** Type 66 SV III ZW M16i
Ser. no. 393.007.702
- 11** Type 66 SV III ZW with fork 16x32
and safety-bolt, Ser. no. 393.007.705
- 12** Type 66 SV III ZW with
DOUGHTY® coupler T58101
for tube diameter 48-51 mm
Ser. no. 393.007.704



Holder type 80 SV III

- 13** Type 80 SV III Integral ring
Internal ring- \varnothing 40 mm
Ser. no. 393.009.011
- 14** Type 80 SV III ZW with ring
Internal ring- \varnothing 40 mm
Ser. no. 393.009.015
- 15** Type 80 SV III M20
Ser. no. 393.009.003
- 16** Type 80 SV III ZW M12i
Ser. no. 393.009.008
- 17** Type 80 SV III ZW with fork 20x40
and safety-bolt, Ser. no. 393.009.023
- 18** Type 80 SV III ZW with
DOUGHTY® coupler T57010
for tube diameter 48-51 mm
Ser. no. 393.009.009



TÜV GS and DGUV Test - Double-Tested and Double-Certified



REUTLINGER® cable grippers Type 50 SV III, Type 66 SV III and Type 80 SV III are covered by a test certificate, approving them for use within the scope of standard "DGUV Vorschrift 17" (formerly "BGV C1"). The "DGUV Test" certificate authorises the cable grippers for use within the scope of the accident prevention regulations applicable to event and production facilities for stage presentations. The "DGUV Test" certificate is awarded only after the cable grippers

have successfully undergone extensive testing under all possible load conditions, with due regard also to any reasonably foreseeable misuse. REUTLINGER® cable grippers Type 50 SV III, Type 66 SV III and Type 80 SV III are the only ones of their kind to have been approved by the employers' liability insurance associations for the suspension of loads in the field of event technology; they also bear the "GS" (Tested Safety) mark awarded by the German TÜV (independent technical inspection association).



Cables ¹⁾				Recommended cables & working loads ²⁾							
Ø [mm]	Material	Surface	Construction	tenfold safety [DGUV] fivefold safety [TÜV/GS]							
				Type 50 SV III		Type 66 SV III		Type 80 SV III			
				DGUV ³⁾	TÜV/GS	DGUV ³⁾	TÜV/GS	DGUV	TÜV/GS		
4,0	Steel	zinc-plated silver/black	6x7+1FE, 1.770 N/mm ²	60 kg	120 kg						
	Steel	zinc-plated silver	6x19+1FE, 1.770 N/mm ²	60 kg	120 kg						
5,0	Steel	zinc-plated silver/black	6x7+1FE, 1.770 N/mm ²	90 kg	180 kg	90 kg ⁴⁾	180 kg ⁴⁾				
	Steel	zinc-plated silver	6x19+1FE, 1.770 N/mm ²	90 kg	180 kg	90 kg ⁴⁾	180 kg ⁴⁾				
6,0	Steel	zinc-plated silver	6x19+1FE, 1.770 N/mm ²			135 kg	270 kg	135 kg	270 kg		
	Steel	zinc-plated black	6x19+1SE, 1.960 N/mm ²			135 kg	270 kg	135 kg	270 kg		
6,35 (1/4")	Steel	zinc-plated silver	6x19+1FE, 1.770 N/mm ²			150 kg	300 kg				
	Steel	zinc-plated silver	6x19+1SE, 1.770 N/mm ²			150 kg	300 kg				
8,0	Steel	zinc-plated silver	6x19+1FE, 1.770 N/mm ²					240 kg	480 kg		
	Steel	zinc-plated silver	6x37+1FE, 1.770 N/mm ²					240 kg	480 kg		
	Steel	zinc-plated black	6x19+1SE, 1.960 N/mm ²					240 kg	480 kg		

1) All cables are available in galvanised (silver) and black zinc-plated finish. 2) Further technical and safety details can be found in the operating instructions (www.reutlinger.de) 3) DGUV Certificate No. OA 1351010 (valid until 30.09.2016) - superseded by OA 1651018 (valid from 01.10.2016). Only the values given in this table apply; previous specifications are no longer valid. 4) Pending approval.

REUTLINGER®
systematic suspension

Reutlinger GmbH

Offenbacher Landstr. 190
60599 Frankfurt
Germany
Telefon +49 69 965228-0
Telefax +49 69 965228-30
E-Mail info@reutlinger.de
Internet www.reutlinger.de

Sales

Silvia Kopka
+49 69 965228-12
s.kopka@reutlinger.de
Stephanie Händler
+49 69 965228-18
s.haendler@reutlinger.de
Ana Maria Ruiz
+49 69 965228-47
am.ruiz@reutlinger.de

Technical consultations

Dipl. Ing. Norbert Orban
+49 69 965228-57
n.orban@reutlinger.de