DRAWING NUMBER
BL/D 7396 INST

USED ON

THIRD ANGLE PROJECTION

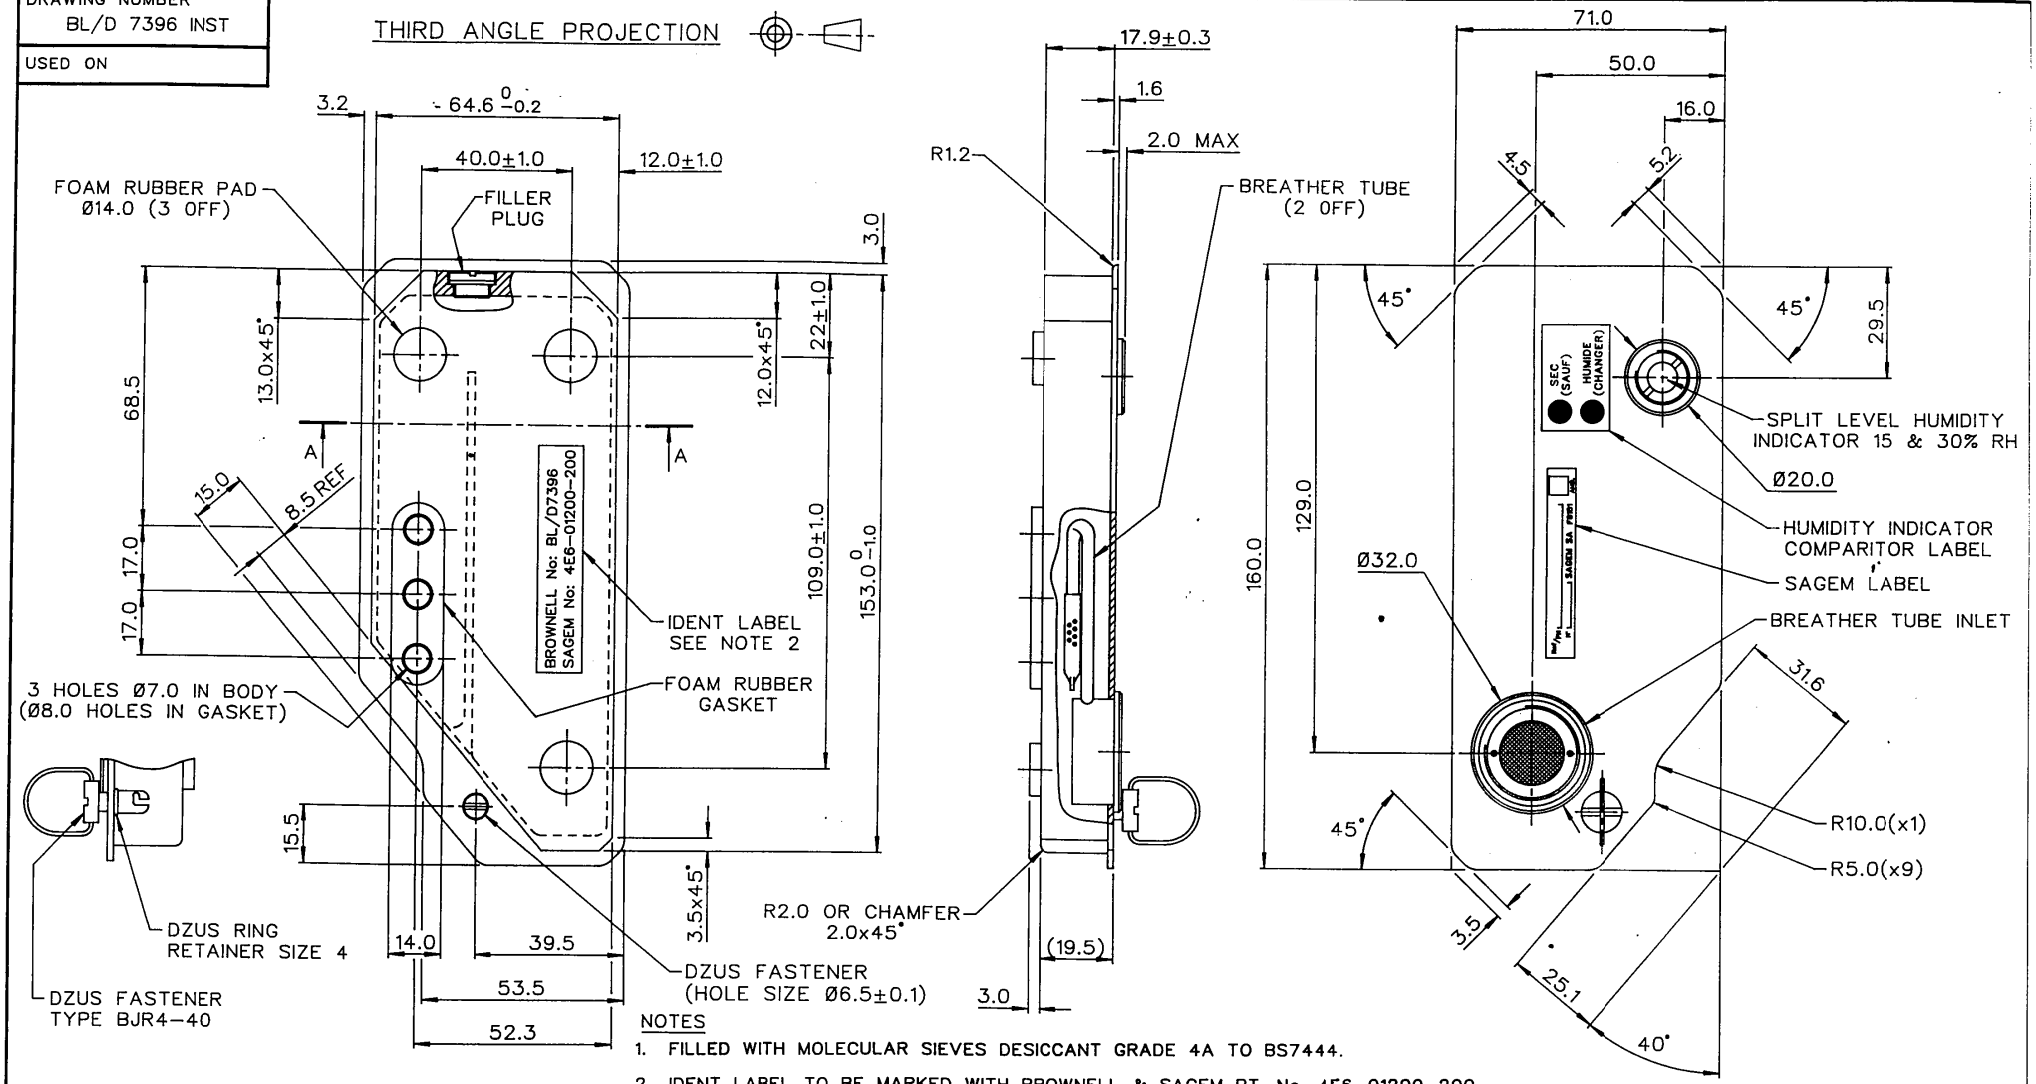

NOTES

1. FILLED WITH MOLECULAR SIEVES DESICCANT GRADE 4A TO BS7444.
2. IDENT LABEL TO BE MARKED WITH BROWNELL & SAGEM PT. No. 4E6-01200-200.
3. FILTRATION LEVEL: CLASS 1000.
4. OPERATION TEMPERATURE: −40 TO +70 °C. STORAGE TEMPERATURE: −55 TO +85 °C.
5. PACKAGED FOR A SHELF LIFE OF 5 YEARS.
6. PACKAGING LABEL TO STATE SAGEM PART No & ISSUE, DATE OF MANUFACTURE, USE BY DATE AND WORDING "NE PAS OUVRIR AVANT INSTALLATION".
7. PRESSURE DROP ACROSS DESICCATOR: LESS THAN 20mbar AT 0.1 LITRES/SEC.

PACKING INSTRUCTIONS

POLYTHENE BAG	PGB − 08
BUBBLE BAG	BBG − 02
METAL FOIL BAG	7" x 10"
FOIL	
LABEL WITH ITEM & SERIAL No.	
PACK IN BUBBLE BAG BBG − 02	
LABEL WITH ITEM & SERIAL No.	



SECTION A − A

					6023	F	5/3/03
					6020	E	26/2/03
					5079	D	5/6/97
					5031	C	12/3/97
					4982	B	25/11/96
			6190	G	54-06		A	9/10/96
DRAWN	CHECKED	MOD No	ISSUE	DATE	MOD No	ISSUE	DATE
LJ		CERTIFIED					

MATERIAL: ALUM ALLOY	PROTECTIVE FINISH: ANODISED BLACK	TOLERANCES: ±0.5	CUSTOMER: BROWNELL LTD. LONDON NW10	CONTRACTORS DRAWING REF: —
		DIMENSIONS IN ~~ins~~/mm	TITLE: DESICCANT CONTAINER DEHUMIDIFIER (BREATHER TUBE)	DRAWING NUMBER: BL/D 7396 INST
		SURFACE ROUGHNESS —		
		SCALE 1 : 1		

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION