





**HJT Bifacial
Glass Glass**

**30
Years**

Linear Power GUARANTEED


2-30 Years Decay Less Than 0.25% Annually On Average

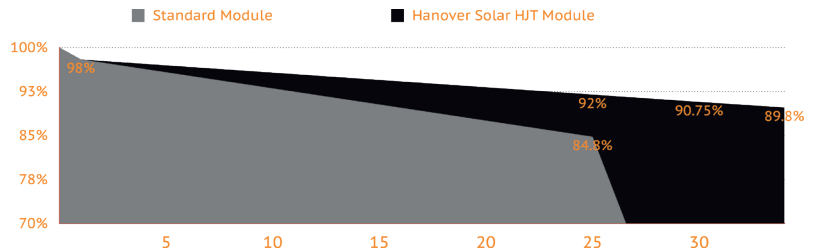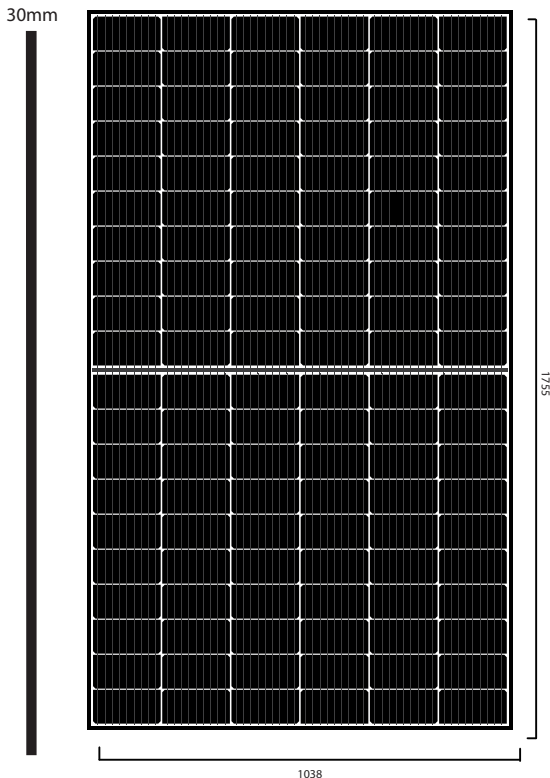

Mechanical Characteristics

Solar Cell Quantity	HJT 166 x 83 mm 120 pcs (6 x 20)
Dimensions	1755 x 1038 x 30 mm
Glass	High Transmission Tempered Glass
Frame	Anodized Aluminium Alloy 30mm
Backsheet	Transparent Glass
Junction Box	TÜV Certified IP67
Series Fuse Rating	20A x 3 diodes
Maximum System Voltage	1500V DC
Max.Wind Load /Snow Load	2400/5400
Output Cables	300 mm / 4.0 mm ²
Test Standard Condition	AM=1.5 E=1000/ m ² TC=20°C
NOCT	45°C +/- 2°C
Bifaciality	85 +/- 5%
Temperature Coefficients:	Pmax -0.24%/K Voc -0.22%/K; Isc 0.047%/K

I-V Curve

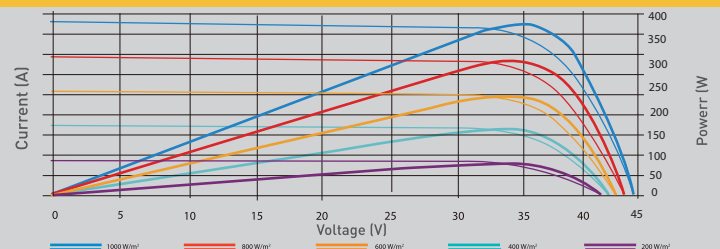

Electrical Characteristics

Item no.	Pmax	Vmp	Imp	Voc	Isc	Mod. %
HS400M-60-166GP	400W	38.43	10.41A	45.45V	11.13A	21.68%

Packaging Configuration

PACKAGE	40'HQ Container	PALLET	
PCS	949 PCS	35 PCS	Weight 22.8 kg

CAUTION: read the installation instruction before using the product.

©2021 Hanover Solar B.V All rights reserved, The specification included in this datasheet are subject to change without notice.

HANOVER NEW ENERGY PTY LTD
7 Koorabel Place
Baulkham Hills NSW 2153
AUSTRALIA
+61 (0) 881 215 838



HANOVER SOLAR GmbH
Herrenstrasse 13
D30159 Hannover
GERMANY
+49 (0) 511 711 090 0539

HANOVER SOLAR BV
Vierlingweg 39A
Bergen op Zoom 4612PN
NETHERLANDS
+31(0) 165 203 842