



N-Type ABC Black Hole Series

AIKO-A-MAH54Mb

Up to **23.6%**
445W-460W



Product
Warranty



Power
Warranty



reddot winner 2023

Higher Power Output

High Efficiency: 23.6%

Low Degradation: 1st year ≤ 1%, year-on-year ≤ 0.35%

Long Warranty: 15yrs on quality, 30yrs on power

Low Temperature Coefficient: -0.29%/°C

Lower BOS Cost

Pure-black Front without Gridlines

Complete Set of Quality Management System

IEC 61730 (2016) IEC 61215 (2021)

ISO 9001:2015 Quality Management System

ISO 14001:2015 Environmental Management System

ISO 45001:2018 Occupational Safety and Management System





460W
Output

23.6%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

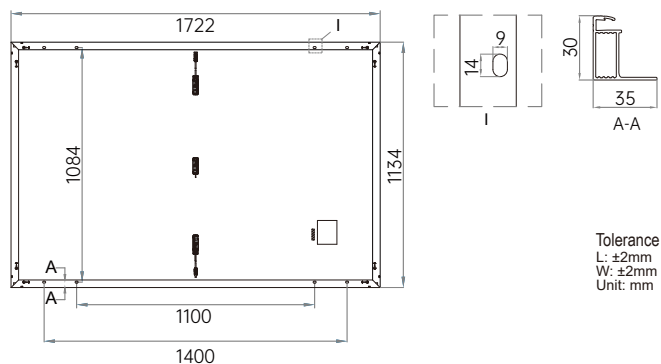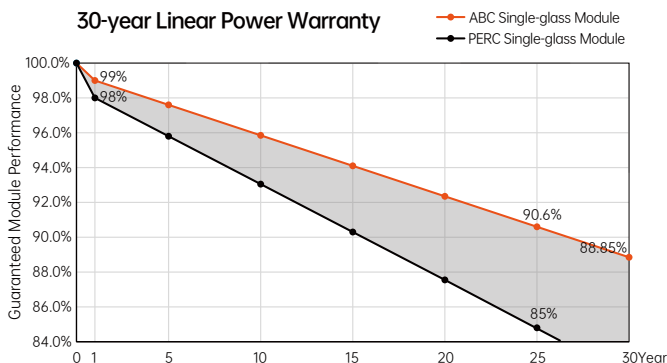

Electrical Characteristics (STC: AM1.5 1000W/m ² 25°C NOCT: AM1.5 800W/m ² 20°C 1m/s)		Power Tolerance: 0~+3%		Max Power Test Uncertainty: ±3%	
Model	AIKO-A445-MAH54Mb		AIKO-A450-MAH54Mb		AIKO-A460-MAH54Mb
Test Conditions	STC	NOCT	STC	NOCT	STC
P _{max} [W]	445	336	450	339	460
V _{oc} [V]	40.09	37.76	40.19	37.85	40.39
V _{mp} [V]	33.91	31.94	34.01	32.03	34.21
I _{sc} [A]	13.69	11.10	13.75	11.15	13.87
I _{mp} [A]	13.13	10.52	13.24	10.61	13.45
Module Efficiency	22.8%		23.0%		23.6%

Mechanical Specification	
Cell Type	Mono-crystalline Silicon
Front Cover	3.2 mm tempered glass, with anti-reflection coating
Frame	Black anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) 350mm or Customized Length
No. of Cells	108(6*18)
Junction Box	IP68, three bypass diodes
Connector	MC4 compatible
Weight	22.2Kg±3%
Dimension	1722*1134*30mm
Package Detail	36pcs per pallet/216 pcs per 20' GQ/936pcs per 40' HQ

Temperature Ratings (STC)	
Temperature Coefficient of I _{sc}	+ 0.05%/K
Temperature Coefficient of V _{oc}	- 0.24%/K
Temperature Coefficient of P _{max}	- 0.29%/K

Installation Guide	
Operation Temperature	- 40°C~+85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C

