



BIFACIAL DUAL GLASS MONOCRYSTALLINE MODULE

PRODUCT: TSM-NEG9RC.27

POWER RANGE: 415-445W

445W

MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

22.3%

MAXIMUM EFFICIENCY



Small in size, bigger on power

- Up to 445W, 22.3% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



Transparent Dual-glass Design

- Transparent design with aesthetics appearance, 3.2% transparency
- Upgraded dual glass of Vertex S, less prone to micro-cracks and scratches on the back during installation
- Excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance which is fully applicable in coastal, high temperature, humidity area and harsh environment




Ultra-low Degradation, longer warranty, higher output

- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 30 years power warranty




Universal solution for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance up to 5400 Pa positive load and 4000 Pa negative load

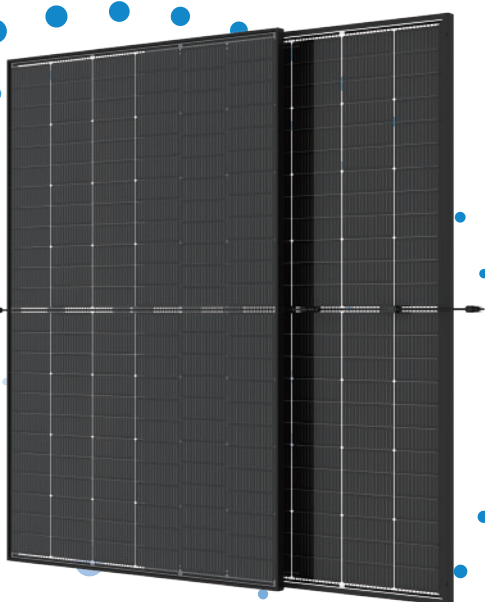

Trina Solar's Vertex Bifacial Dual Glass Performance Warranty



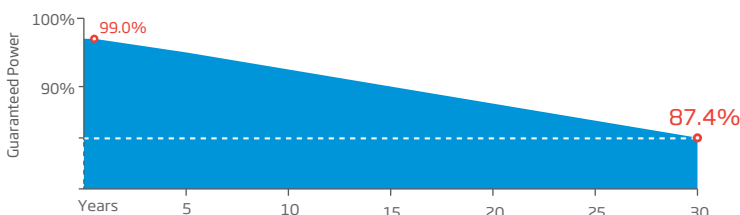


Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716/UL61730
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System

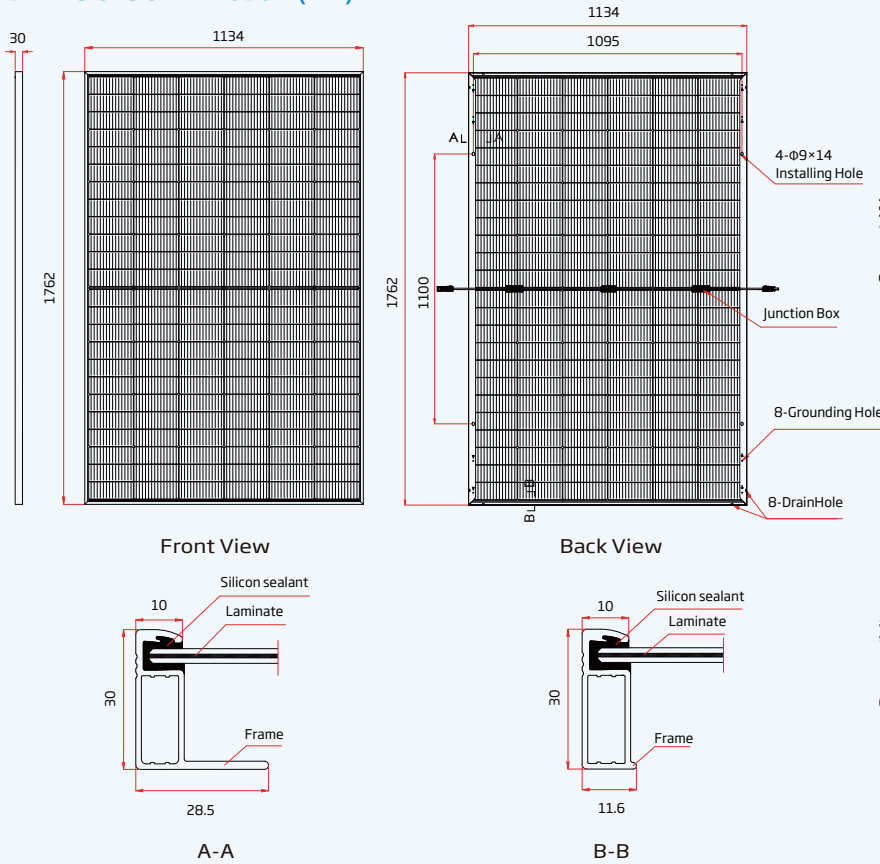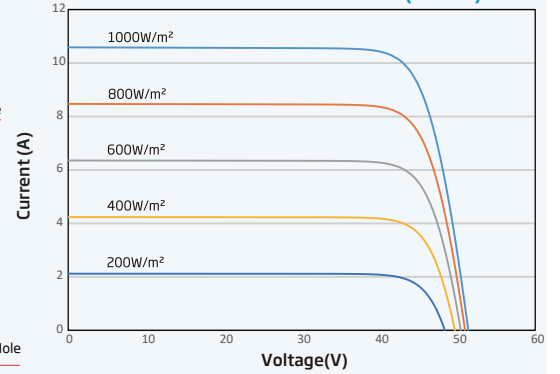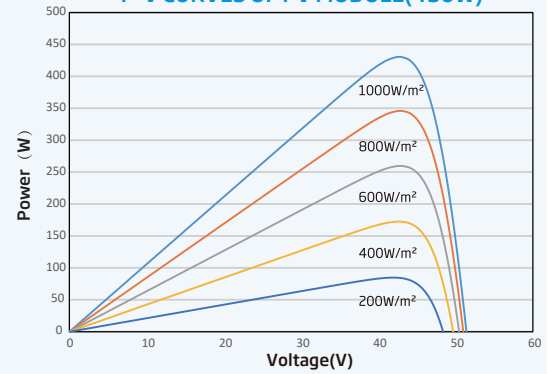

DIMENSIONS OF PV MODULE(mm)

I-V CURVES OF PV MODULE(430W)

P-V CURVES OF PV MODULE(430W)

ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)*	415	420	425	430	435	440	445
Power Tolerance- P_{MAX} (W)	0 ~ +5						
Maximum Power Voltage- V_{MPP} (V)	42.1	42.5	42.9	43.2	43.6	44.0	44.3
Maximum Power Current- I_{MPP} (A)	9.86	9.89	9.92	9.96	9.99	10.01	10.05
Open Circuit Voltage- V_{OC} (V)	50.1	50.5	50.9	51.4	51.8	52.2	52.6
Short Circuit Current- I_{SC} (A)	10.50	10.53	10.56	10.59	10.64	10.67	10.71
Module Efficiency η_m (%)	20.8	21.0	21.3	21.5	21.8	22.0	22.3

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power - P_{MAX} (Wp)	448	454	459	464	470	475	480
Maximum Power Voltage- V_{MPP} (V)	42.1	42.5	42.9	43.2	43.6	44.0	44.3
Maximum Power Current- I_{MPP} (A)	10.65	10.68	10.71	10.76	10.79	10.81	10.85
Open Circuit Voltage- V_{OC} (V)	50.1	50.5	50.9	51.4	51.8	52.2	52.6
Short Circuit Current- I_{SC} (A)	11.34	11.37	11.40	11.44	11.49	11.52	11.57
Irradiance ratio (rear/front)	10%						

Power Bifaciality: 80±5%.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{MAX} (Wp)	316	320	324	328	332	335	338
Maximum Power Voltage- V_{MPP} (V)	39.3	39.7	40.0	40.4	40.7	41.0	41.3
Maximum Power Current- I_{MPP} (A)	8.03	8.07	8.09	8.11	8.15	8.17	8.20
Open Circuit Voltage- V_{OC} (V)	47.5	47.8	48.2	48.7	49.1	49.4	49.8
Short Circuit Current- I_{SC} (A)	8.46	8.49	8.51	8.53	8.57	8.60	8.63

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	144cells
Module Dimensions	1762×1134×30 mm (69.06×43.15×1.18 inches)
Weight	21.0kg (46.30 lb)
Front Glass	1.6 mm (0.06 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	1.6 mm (0.06 inches), High Transmission, Heat Strengthened Glass
Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Portrait: 350/280 mm (13.78/11.02 inches) Length can be customized
Connector	MC4 EVO2 / TS4 PLUS / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.30%/°C
Temperature Coefficient of V_{OC}	-0.24%/°C
Temperature Coefficient of I_{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	25A

WARRANTY

15 year Product Workmanship Warranty
30 year Power Warranty
1% first year degradation
0.4% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 936 pieces