


BRASS JACOB CABLE GLANDS, METRIC

Material	Brass CuZn39Pb3, nickel-plated
Connecting thread	Metric (EN 60423)
Temperature range	-20 °C up to +100 °C
Protection grade	IP68 – 5 bar / IP69K (tested for M12 - M25, M50, M63)
Test standard	EN 62444 / UL 514B
UL / CSA-File	E140310

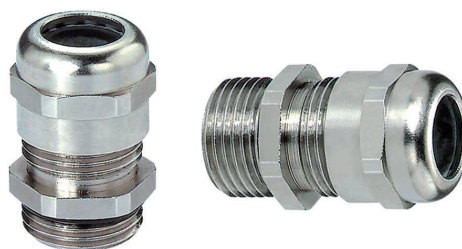

Typenr.	Connecting thread	Cable diameter (mm)	Thread length (mm)	Packing (pcs)
M12 brass cable gland	M12 x 1,5	3,0 - 6,0	5,0	100
M16 brass cable gland	M16 x 1,5	5,0 - 9,0	5,0	100
M20 brass cable gland	M20 x 1,5	9,0 - 13,0	6,0	100
M25 brass cable gland	M25 x 1,5	11,0 - 16,0	7,0	50
M32 brass cable gland	M32 x 1,5	14,0 - 21,0	8,0	25
M40 brass cable gland	M40 x 1,5	19,0 - 27,0	8,0	10
M50 brass cable gland	M50 x 1,5	24,0 - 35,0	9,0	5
M63 brass cable gland	M63 x 1,5	32,0 - 42,0	10,0	5
M63-1 brass cable gland	M63 x 1,5	38,0 - 48,0	10,0	5

In addition to our standard range of cable glands and accessories, we can also supply all other Jacob products (on request).
For this, we refer you to the website of Jacob GmbH: www.jacob-gmbh.de/en/