

AEG

AEG PREMIUM SERIES



ABC TECHNOLOGY,
SUPERIOR EFFICIENCY

AS-M1089B-GA(M10)/HV / N-TYPE ABC GLASS-GLASS PHOTOVOLTAIC MODULE

CHARACTERISTICS



Power range: 445-455 Wp
Glass-glass and ABC N-type back-contact technology
Suitable for: residential / commercial installations

EXTRA PEACE OF MIND



Extensive certifications and rigorous Quality Control
40 years product warranty
40 years performance warranty

PRODUCT NAME CODE (PNC)



AS-M1089B-GA(M10)-445/450/455/HV
(black rear glass, black frame)

ADVANTAGES



Superior efficiency (up to 23.3%)
thanks to ABC N-type back-contact technology
Sleek full black look, premium aesthetics
Higher sustainability thanks to silver-free metallization
Outstanding performance / low degradation over product lifetime



AS-M1089B-GA(M10)/HV / N-TYPE ABC GLASS-GLASS PHOTOVOLTAIC MODULE

PRODUCT SERIES & NAMECODE (PNC)	
AEG PREMIUM SERIES	
AS-M1089B-GA(M10)/HV-445/450/455/HV	
black frame, black rear glass	

ELECTRICAL CHARACTERISTICS AT STC ^{1,2}				
Nominal Power (Pmax)	[Wp]	445	450	455
Power Sorting ³	[W]	0-5	0-5	0-5
Maximum Power Voltage (Vmp)	[V]	33.79	33.89	33.99
Maximum Power Current (Imp)	[A]	13.18	13.28	13.39
Open Circuit Voltage (Voc)	[V]	40.15	40.25	40.35
Short Circuit Current (Isc)	[A]	13.68	13.74	13.80
Module Efficiency (ηm)	[%]	22.8	23.0	23.3
Maximum System Voltage	[V]	1500	1500	1500
Series Fuse Maximum Rating	[A]	25	25	25


ELECTRICAL CHARACTERISTICS AT NOCT ⁴				
Maximum Power (Pmax)	[W]	336	339	343
Maximum Power Voltage (Vmp)	[V]	31.83	31.92	32.01
Maximum Power Current (Imp)	[A]	10.56	10.65	10.73
Open Circuit Voltage (Voc)	[V]	37.82	37.91	38.00
Short Circuit Current (Isc)	[A]	11.03	11.08	11.13

MECHANICAL CHARACTERISTICS		
Solar cells	monocrystalline [pcs]	108
	Dimensions [mm]	M10 Half-cut ABC [182 x 91]
Front glass	Coated semi-tempered glass	
	Thickness [mm] / [in]	2.0 / 0.08
Back glass	2.0 / 0.08	Black
Frame	Anodized aluminum alloy	Black
Junction box	Split-type, IP68	
	Bypass diodes	3
UV-resistant cables	Length [mm] / [in]	1200 / 47.24
	Section [mm ²]	4
Connectors	MC4 EVO2	
Dimensions	H x L x W [mm]	1722 x 1134 x 30
	H x L x W [in]	67.80 x 44.65 x 1.18
Weight	[kg] / [lbs]	24 / 52.90
Maximum load	Wind / Snow [Pa]	2400 / 5400
Fire Class		Class C

PACKAGING		
Packing configuration	[pcs/pallet]	36
Loading capacity	[pcs/40 ft container]	936

NOTES
1-Standard Test Conditions (STC): Irradiance 1000 W/m ² , Air Mass AM = 1.5, Cell Temperature 25°C
2-Measurement tolerances (IEC 61215:2016): Pmax±3%, Voc±3%, Isc±3%
3-AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power
4-NOCT: Nominal operating cell temperature, Irradiance 800 W/m ² , Wind Speed 1m/s, Ambient Temperature 20°C, Air Mass AM=1.5
5-Full text of the Warranty Terms available at: www.aeg-solar.com
6-(PRE/GG) No less than 99% of the minimum "Peak Power at STC" in the first year; power output decline no more than 0.4% per year thereafter, ending with at least 83.4%.
Dimensions in the technical picture are expressed in mm with tolerance ±2 mm (±0.079") / Version 2024.01.V1.EN © Solar Solutions AG. Specifications in this datasheet are subject to change without notice.
AEG is a registered trademark used under license from AB Electrolux (publ).

CERTIFICATIONS		
System	ISO 9001, ISO 14001, ISO 45001	
Product	IEC 61730, IEC 61215	

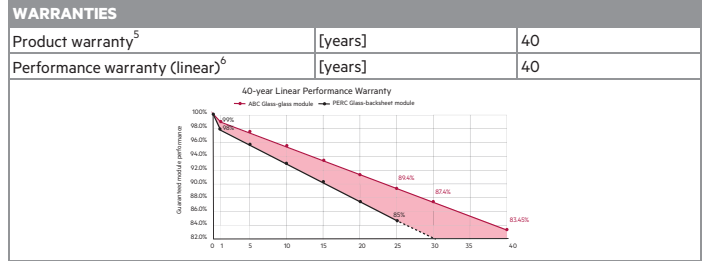

TEMPERATURE CHARACTERISTICS		
NOCT	[°C]	45 (±2)
Pmax Temp. Coefficient (γ)	[%/°C]	-0.29
Voc Temp. Coefficient (β)	[%/°C]	-0.24
Isc Temp. Coefficient (α)	[%/°C]	0.05
Operating temperature	[°C]	-40~+85

